

# EKPG 180 G



Sample image

**Order symbol :** EKPG 180 G

**Product nr :** 2538052

**Description :** Enclosure, PC




**Remarks :** Grey cover

**EAN :** 6418074013613

**El. number :**

- Finland : 3425425
- Sweden : 2538052

**Including :** Flanged Base with screws for mounting plate. cover with PUR gasket and polyamide cover screws.

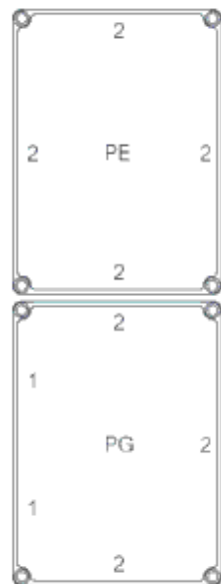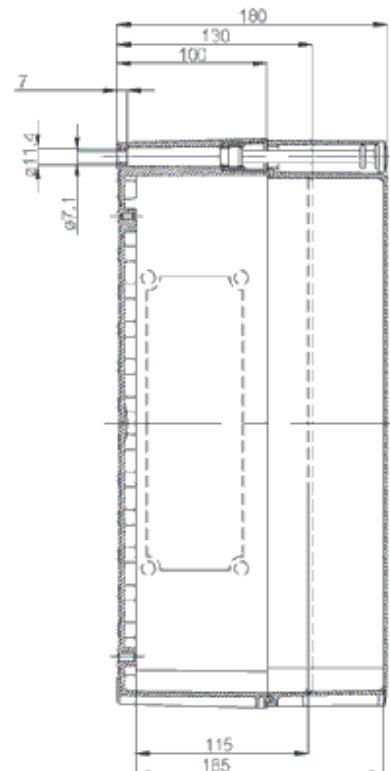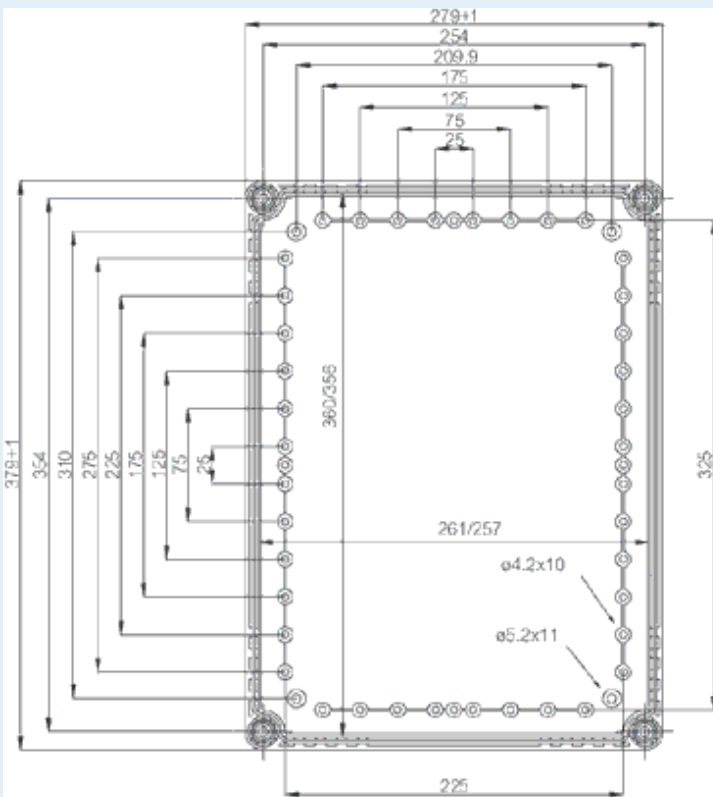

**Dimensions :**      **Height**      **Width**      **Depth**

**Accessories :**

|        |       |       |      |
|--------|-------|-------|------|
| mm :   | 380   | 280   | 180  |
| inch : | 14.96 | 11.02 | 7.09 |

#### Materials :

|                   |                      |
|-------------------|----------------------|
| Material :        | Polycarbonate        |
| Base colour :     | RAL_7035             |
| Cover colour :    | RAL 7035 -light grey |
| Gasket material : | Polyurethane         |

#### Temperatures :

|                               |             |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 80  |
| Temperature °F (continuous) : | -40 ... 175 |

|                    |   |
|--------------------|---|
| EKV 32             | DIN-35 Mounting rail, for enclosures:<br>(335 x 35 x 7)   |
| EKV 22             | DIN-35 Mounting rail, for enclosures:<br>(235 x 35 x 7)   |
| EKPZR              | Extension frame, for enclosures:<br>(380 x 280 x 50)      |
| EKPVT              | Mounting plate, for enclosures:<br>(338 x 238 x 1.5)      |
| MPI EKP 3828       | Multiperforated plastic mounting plate<br>(338 x 238 x 4) |
| DRS EKP 2838 2x19M | DIN rail set<br>(364 x 264 x 90)                          |
| DRS EKP 3828 3x14M | DIN rail set<br>(364 x 264 x 90)                          |

#### Ratings :

|   |                   |
|---|-------------------|
| Ingress protection (EN 60529):          | IP66; IP67;       |
| Impact Resistance (EN 62262):           | IK08;             |
| electrical_insulation :                 | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes               |
| UV resistance :                         | UL 746C           |
| Flammability Rating :                   | UL 94 V0          |
| Glow Wire Test (IEC 695-2-1) °C :       | 960C              |

#### Certificates :

SGSFIMKO\_EK