

NEO ABS 423215 G



Sample image

Order symbol : NEO ABS 423215 G

Product nr : 4812002

UL Code : -

Description : Hinged ABS enclosure with grey cover


Remarks : -

EAN : 6418074311450

El. number :

- Finland : 3424419
- Denmark : 8212098103
- Sweden : 2506223

Including : ABS base and cover, mounting screws for mountingplate/DIN rail.

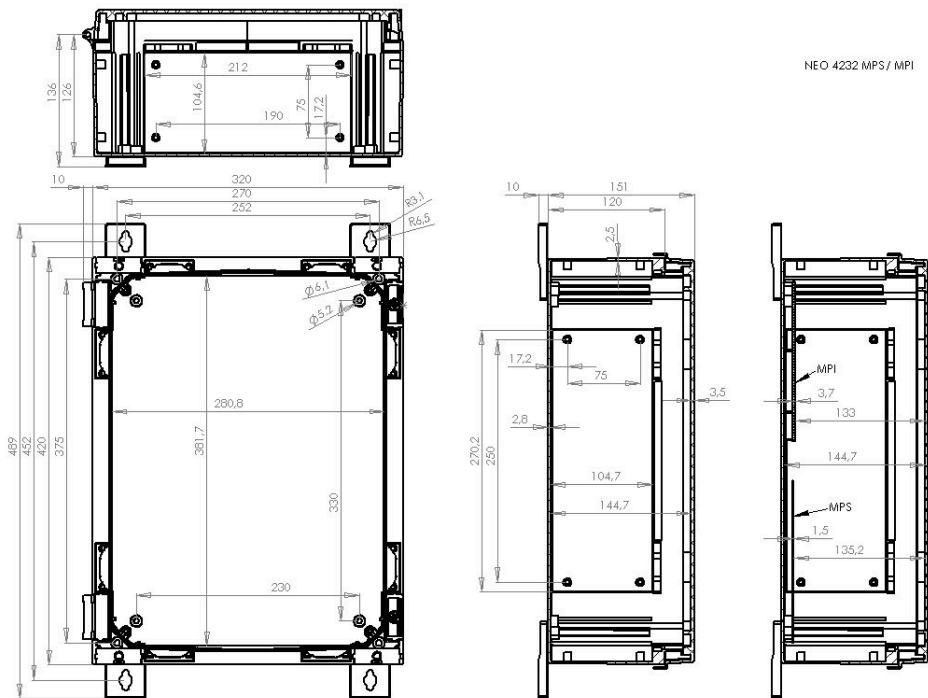

Dimensions :

| | Height | Width | Depth |
|--------|--------|-------|-------|
| mm : | 420 | 320 | 150 |
| inch : | 16.54 | 12.6 | 5.91 |

Accessories :

NEO MPI 4232 Multiperforated plastic mounting plate (375 x 265 x 3)

Materials :

| | |
|-------------------|----------------------|
| Material : | ABS |
| Base colour : | RAL_7035 |
| Cover colour : | RAL 7035 -light grey |
| Gasket material : | Polyurethane |

| | |
|-----------------|---|
| NEO MPS 4232 | Metal mounting plate (375 x 265 x 1.5) |
| PMK NEO 30 | Polemounting kit (400 x 300 x 30) |
| WMK NEO plastic | Wall mounting kit plastic (80 x 70 x 40) |
| DRS NEO 423215 | DIN rail frame set (379 x 279 x 106) |

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 60 |
| Temperature °F (continuous) : | -40 ... 140 |

Ratings :

| | |
|---|-------------------|
| Ingress protection (EN 60529): | IP66; IP67; |
| Impact Resistance (EN 62262): | IK08; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | - |
| Flammability Rating : | UL 94 HB |
| Glow Wire Test (IEC 695-2-1) °C : | 650C |

Certificates :

Certificate FI 40693 A1.pdf