

# PC 100/75 HG



Sample image

**Order symbol :** PC 100/75 HG

**Product nr :** 6011302

UL Name : UL PC 100/75 HG

**Description :** Enclosure, PC


**Remarks :** High base, grey cover

**EAN :** 6418074024404

**El. number :**

- Finland : 3422251
- Denmark : 821202292
- Sweden : 2535513

**Including :** Base with TPE gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

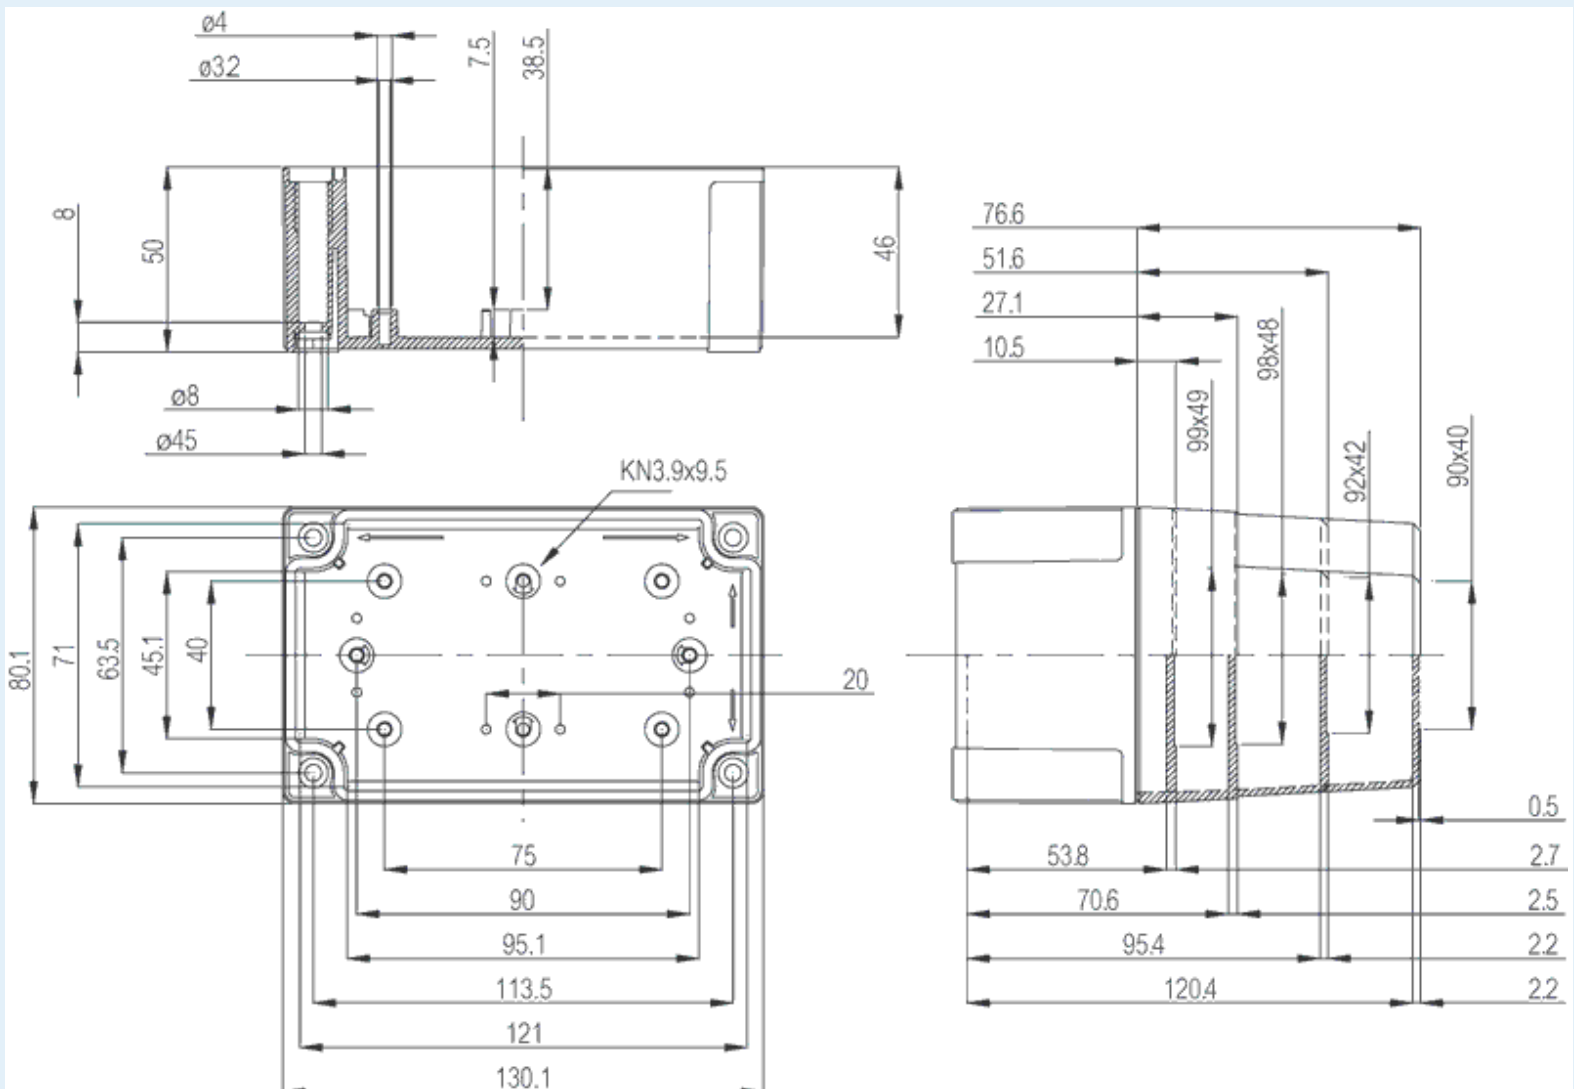

**Dimensions :**

	<b>Height</b>	<b>Width</b>	<b>Depth</b>
mm :	130	80	75
inch :	5.12	3.15	2.95

**Materials :**

Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey
Gasket material :	TPE

**Temperatures :**

Temperature °C (continuous) :	-40 ... 80
Temperature °F (continuous) :	-40 ... 175

**Accessories :**

MIV 10	DIN-35 Mounting rail, for enclosures: (100 x 35 x 7)
MIV 5	DIN-35 Mounting rail, for enclosures: (50 x 35 x 7)
MIV 100	Mounting plate (Galvanized steel), for enclosures: (98 x 48 x 1.5)
FP 22046	Wall fastening lug (4 pcs) (35 x 16 x 10)

**Ratings :**

Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK08;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 746C
Flammability Rating :	UL 94 V0
Glow Wire Test (IEC 695-2-1) °C :	960C

**Certificates :**

Certificate FI 40847