

PC 150/100 HT



Sample image

Order symbol : PC 150/100 HT

Product nr : 6011915

UL Name : UL PC 150/100HT

Description : Enclosure, PC


Remarks : High base, smoked transparent cover

EAN : 6418074022431

El. number :

- Finland : 3420465
- Denmark : 8212022483
- Sweden : 2535657

Including : Base with TPE gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

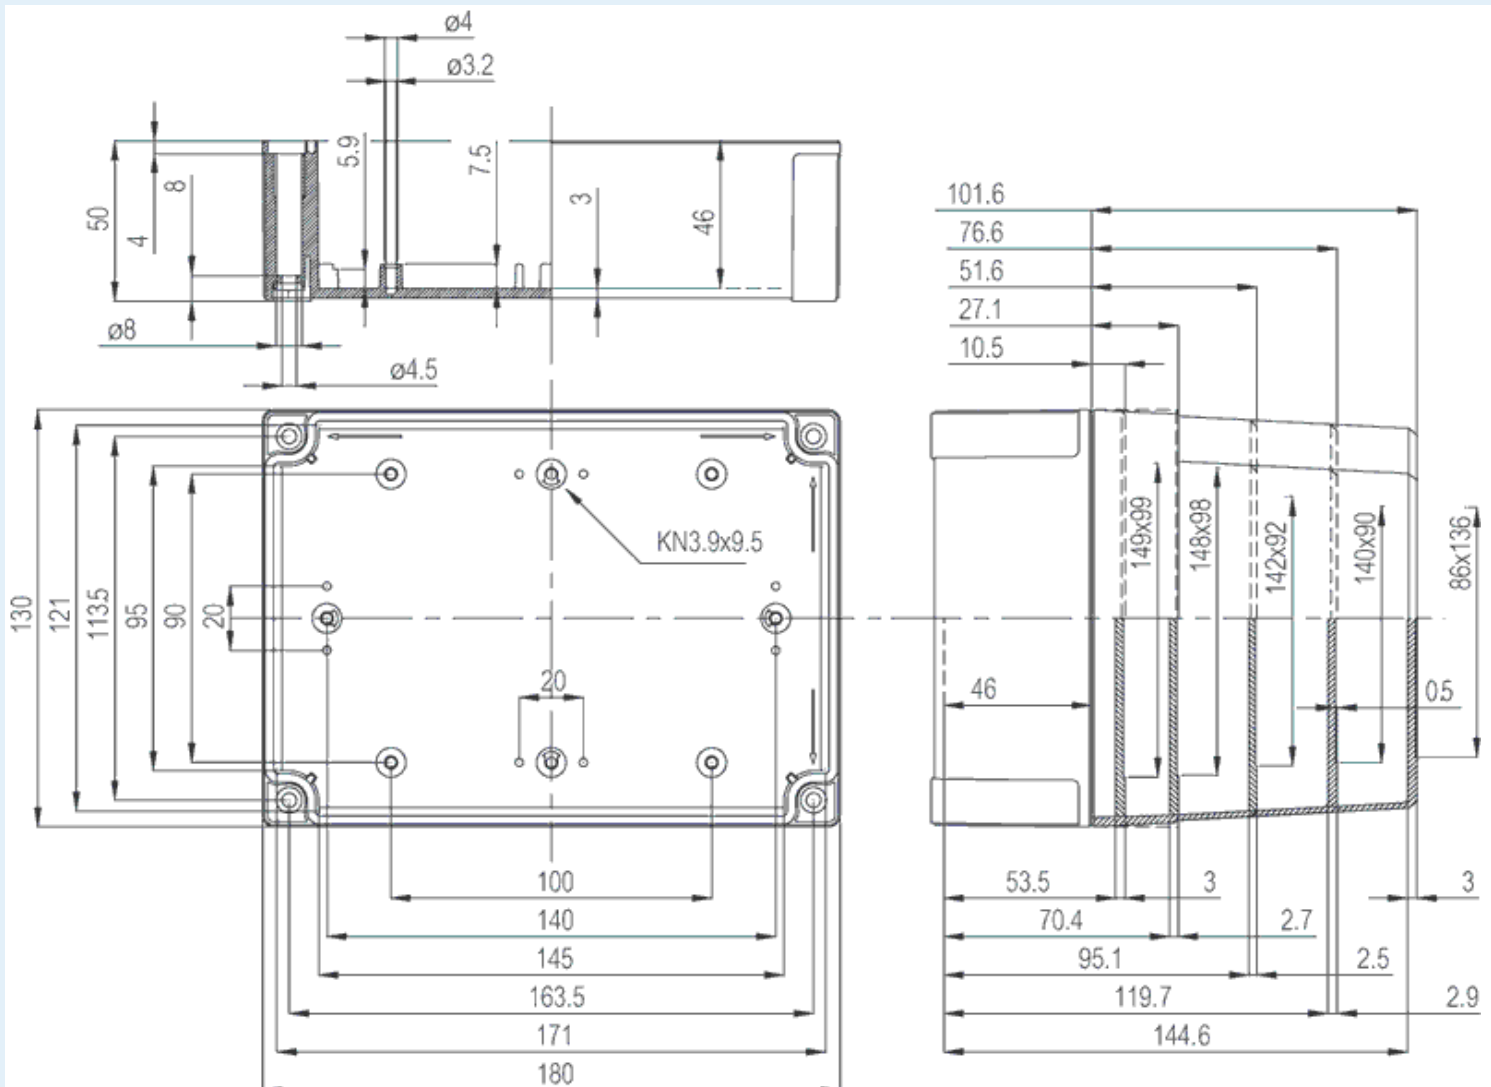

| Dimensions : | Height | Width | Depth |
|---------------------|---------------|--------------|--------------|
| mm : | 180 | 130 | 100 |
| inch : | 7.09 | 5.12 | 3.94 |

Materials :

| | |
|-------------------|---------------|
| Material : | Polycarbonate |
| Base colour : | RAL_7035 |
| Cover colour : | Smoked grey |
| Gasket material : | TPE |

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 80 |
| Temperature °F (continuous) : | -40 ... 175 |

Accessories :

| | |
|----------|--|
| MIV 10 | DIN-35 Mounting rail, for enclosures: (100 x 35 x 7) |
| MIV 150 | Mounting plate (Galvanized steel), for enclosures: (148 x 98 x 1.5) |
| MIV 15 | DIN-35 Mounting rail, for enclosures: (150 x 35 x 7) |
| FP 22046 | Wall fastening lug (4 pcs) (35 x 16 x 10) |

Ratings :

| | |
|---|-------------------|
| Ingress protection (EN 60529): | IP66; IP67; |
| Impact Resistance (EN 62262): | IK08; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | UL 746C |
| Flammability Rating : | UL 94 V0 |
| Glow Wire Test (IEC 695-2-1) °C : | 960C |

Certificates :

Certificate FI 40847