

PC 150/75 LT

Sample image

Order symbol : PC 150/75 LT

EAN : 6418074022394

Product nr : 6012915

El. number :


UL Name : UL PC 150/75 LT

- Finland : 3420455
- Denmark : 8212022441
- Sweden : 2535645

Description : Enclosure, PC

Remarks : Low base, smoked transparent cover

Including : Base with TPE gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

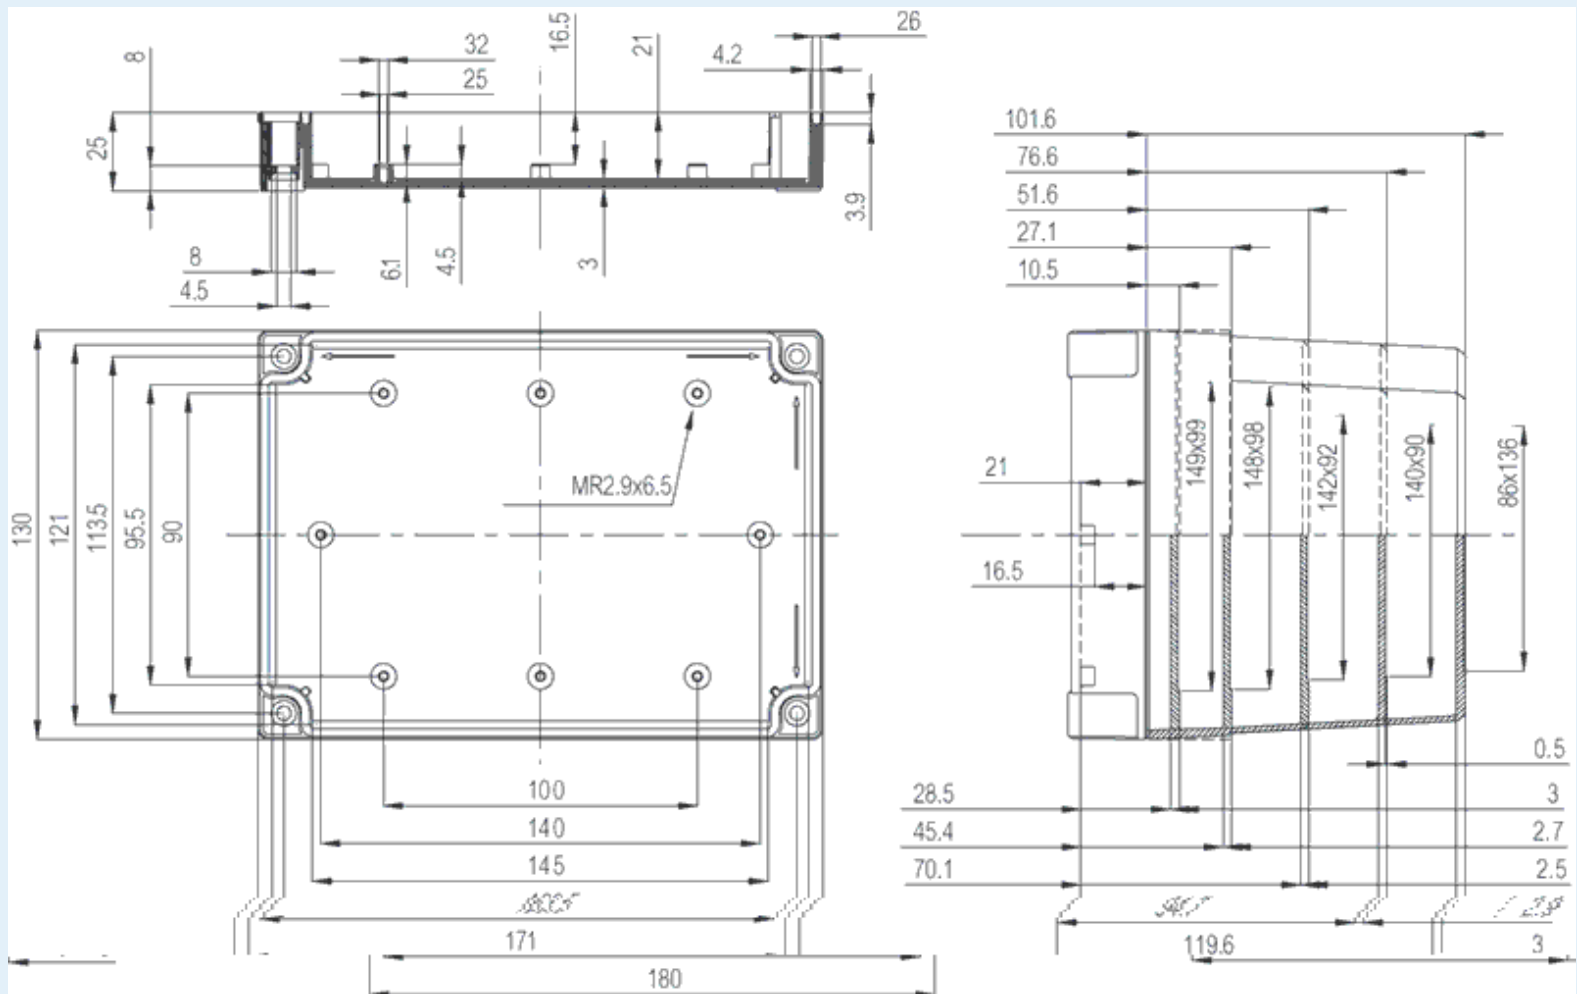

Dimensions :	Height	Width	Depth
mm :	180	130	75
inch :	7.09	5.12	2.95

Accessories :

- MIV 10 DIN-35 Mounting rail, for enclosures: (100 x 35 x 7)
- MIV 150 Mounting plate (Galvanized steel), for enclosures:

Materials :

Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	Clear transparent
Gasket material :	Polyurethane

Temperatures :

Temperature °C (continuous) :	-40 ... 80
Temperature °F (continuous) :	-40 ... 175

(148 x 98 x 1.5)

MIV 15	DIN-35 Mounting rail, for enclosures: (150 x 35 x 7)
FP 22046	Wall fastening lug (4 pcs) (35 x 16 x 10)

Ratings :

Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK08;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 746C
Flammability Rating :	UL 94 V0
Glow Wire Test (IEC 695-2-1) °C :	960C

Certificates :

Certificate FI 40847