

# ABS 150/35 LG

Sample image

**Order symbol :** ABS 150/35 LG

**EAN :** 6418074022899

**Product nr :** 6082313


**El. number :**

**Description :** Enclosure, ABS

- Finland : 3420543
- Denmark : 8212023220
- Sweden : 2535739

**Remarks :** Low base, grey cover

**Including :** Base with TPE gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

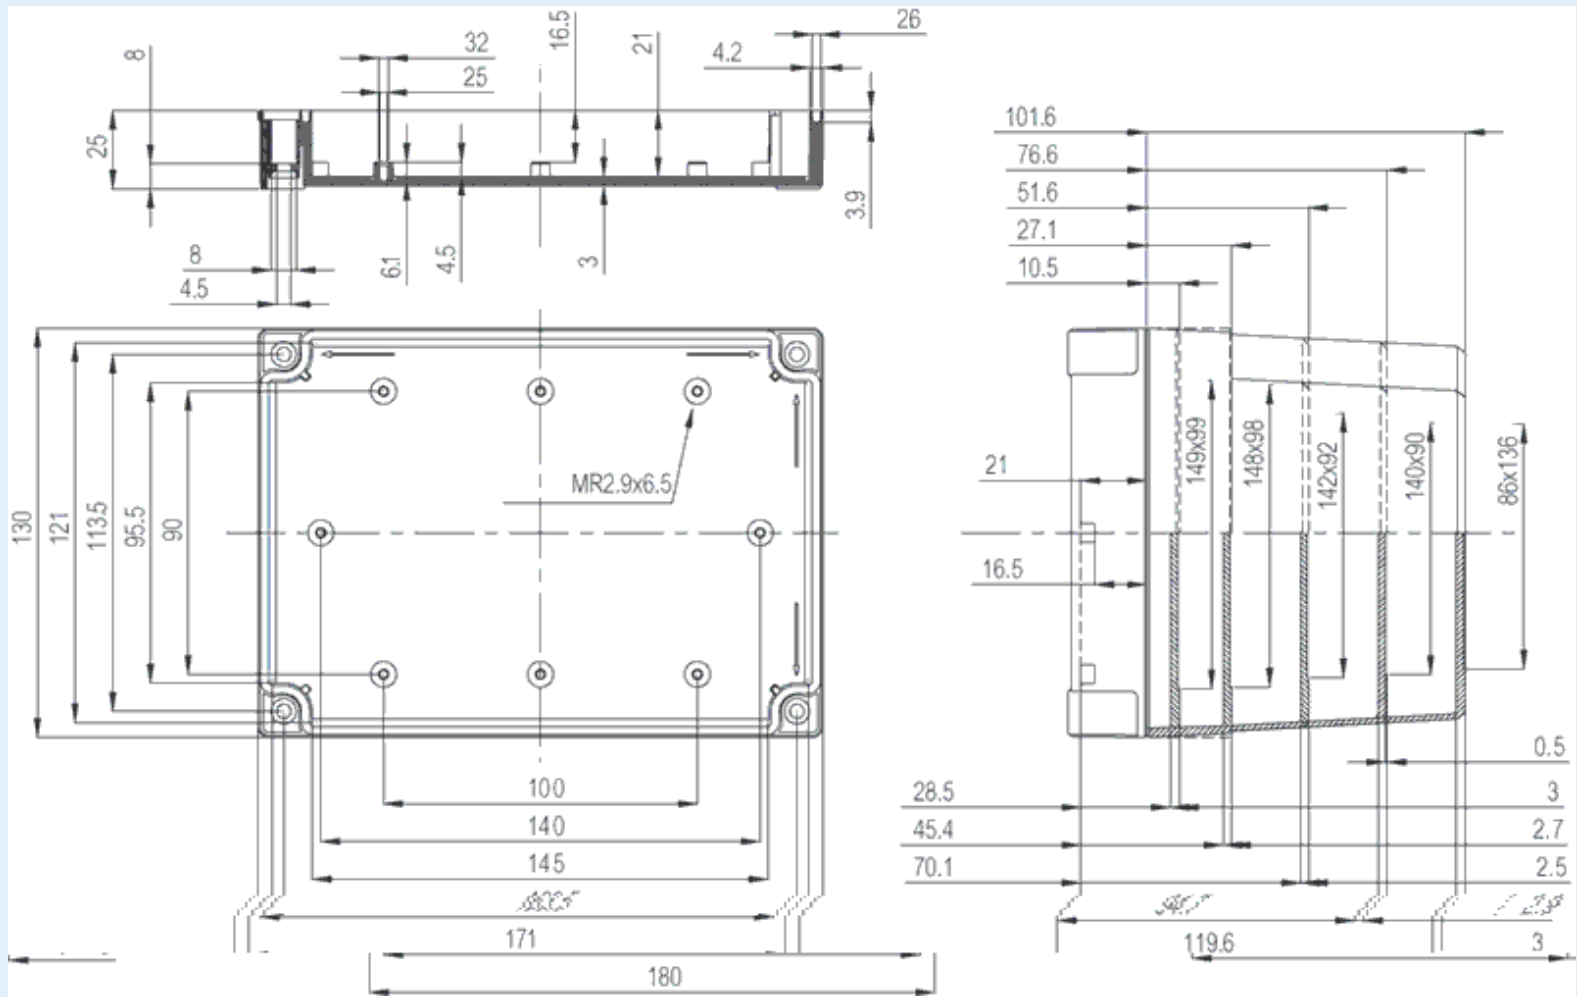

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm :         | 180    | 130   | 35    |
| inch :       | 7.09   | 5.12  | 1.38  |

**Accessories :**

- MIV 10 DIN-35 Mounting rail, for enclosures: (100 x 35 x 7)
- MIV 150 Mounting plate (Galvanized steel), for enclosures: (148 x 98 x 1.5)

**Materials :**

|                   |                      |
|-------------------|----------------------|
| Material :        | ABS                  |
| Base colour :     | RAL_7035             |
| Cover colour :    | RAL 7035 -light grey |
| Gasket material : | Polyurethane         |

**Temperatures :**

|                               |             |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 60  |
| Temperature °F (continuous) : | -40 ... 140 |

|          |   |
|----------|---|
| MIV 15   | DIN-35 Mounting rail, for enclosures:<br>(150 x 35 x 7) |
| FP 22046 | Wall fastening lug (4 pcs)<br>(35 x 16 x 10)            |

**Ratings :**

|   |                   |
|---|-------------------|
| Ingress protection (EN 60529):          | IP66; IP67;       |
| Impact Resistance (EN 62262):           | IK07;             |
| electrical_insulation :                 | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes               |
| UV resistance :                         | -                 |
| Flammability Rating :                   | UL 94 HB          |
| Glow Wire Test (IEC 695-2-1) °C :       | 650C              |

**Certificates :**

Certificate FI 41115