

UL PC 125/60 HG



Sample image

Order symbol : UL PC 125/60 HG

Product nr : 6411307

Description : UL Enclosure, PC


Remarks : Grey cover

EAN : 6418074014320

El. number :

• Denmark : 8212030268

Including : Base with TPE gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

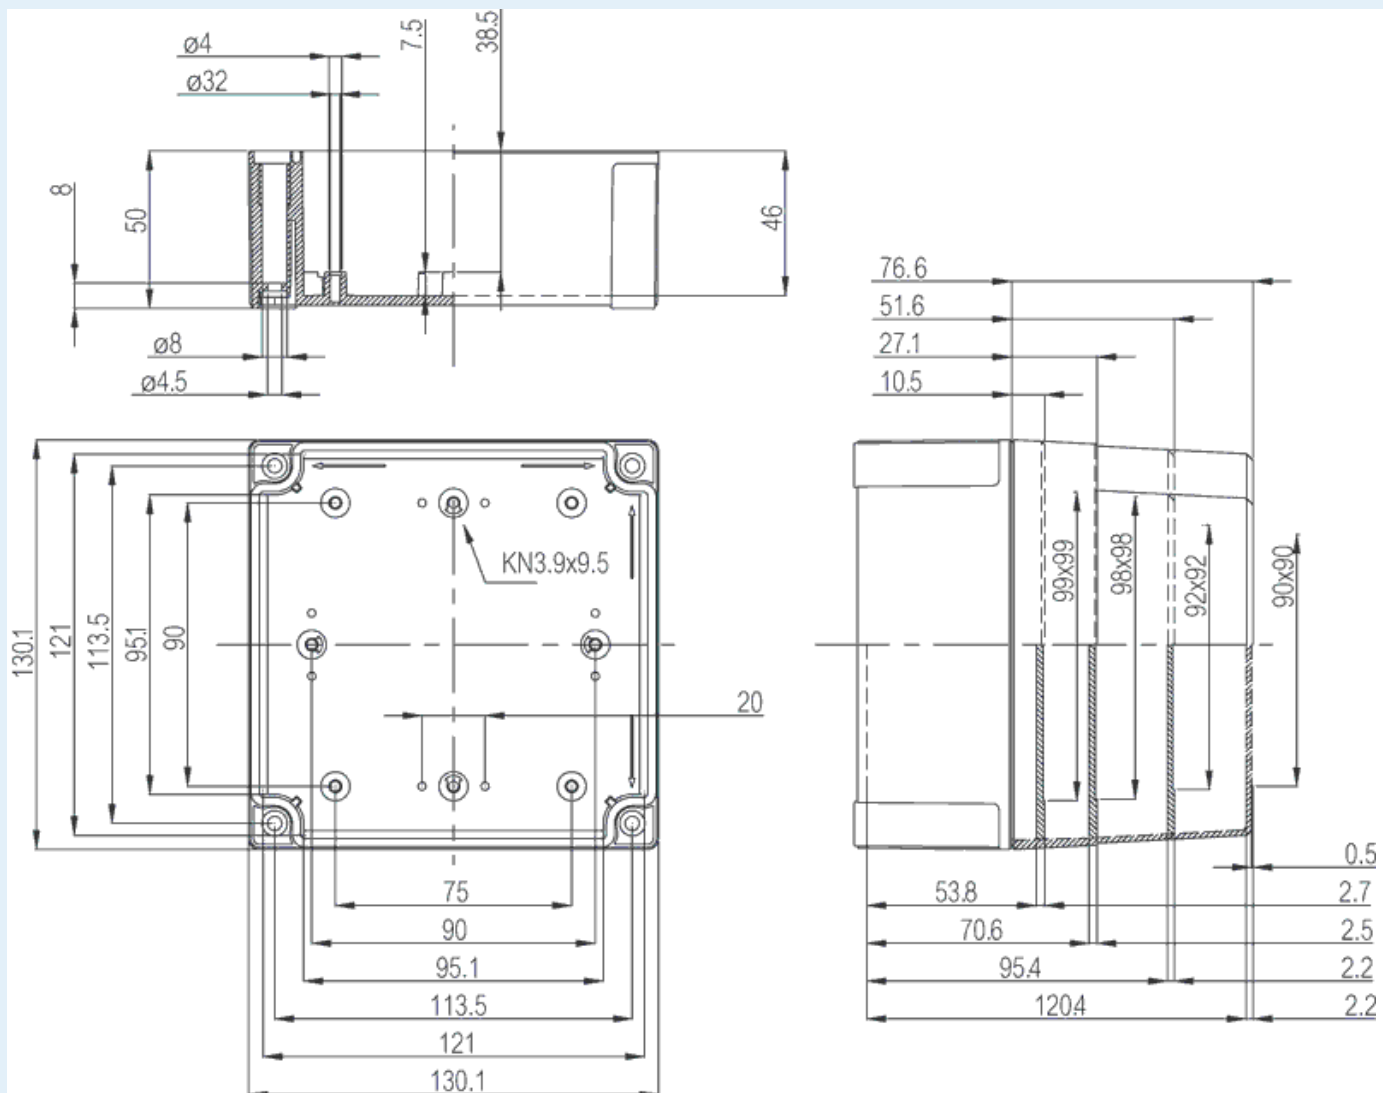

Dimensions :

	Height	Width	Depth
mm :	130	130	60
inch :	5.12	5.12	2.36

Materials :

Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

Temperatures :

Temperature °C (continuous) :	-40 ... 80
Temperature °F (continuous) :	-40 ... 175

Ratings :

Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK08;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 746C
Flammability Rating :	UL 94 V0
Glow Wire Test (IEC 695-2-1) °C :	960C
UL Type	1, 4, 4X and 6

Certificates :

Certificate FI 40847