

# UL PC 125/75 HG



Sample image

**Order symbol :** UL PC 125/75 HG

**Product nr :** 6411308

**Description :** UL Enclosure, PC


**Remarks :** Grey cover

**EAN :** 6418074014337

**El. number :**

- Denmark : 8212030284

**Including :** Base with TPE gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

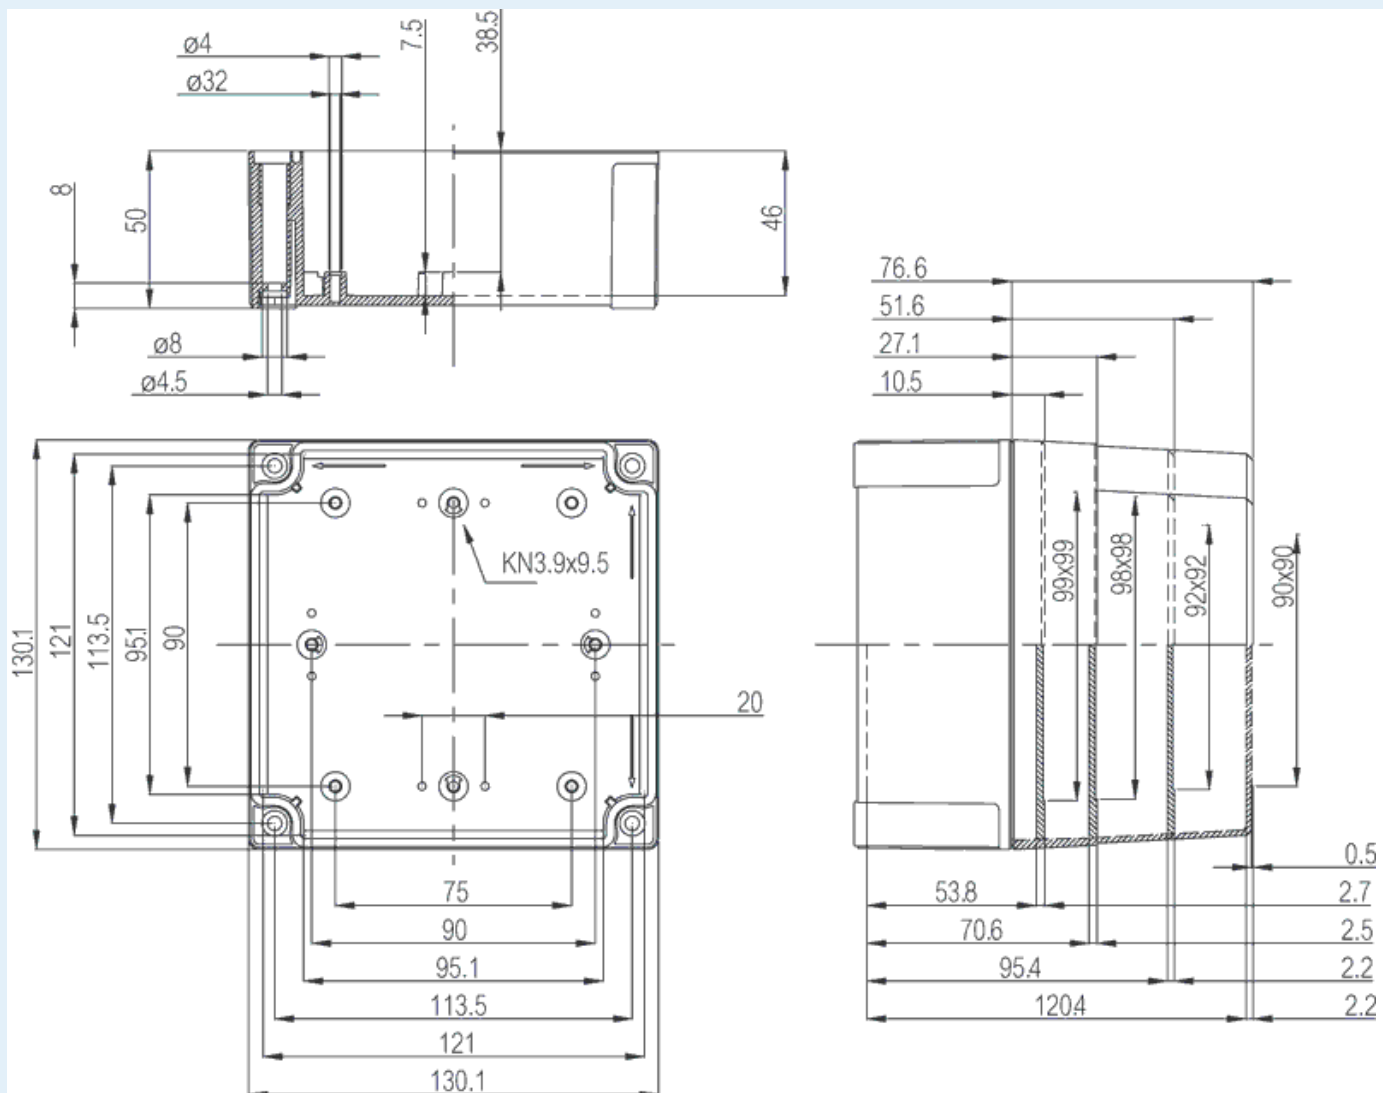

**Dimensions :**

	<b>Height</b>	<b>Width</b>	<b>Depth</b>
mm :	130	130	75
inch :	5.12	5.12	2.95

**Materials :**

Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

**Temperatures :**

Temperature °C (continuous) :	-40 ... 80
Temperature °F (continuous) :	-40 ... 175

**Ratings :**

Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK08;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 746C
Flammability Rating :	UL 94 V0
Glow Wire Test (IEC 695-2-1) °C :	960C
UL Type	1, 4, 4X and 6

**Certificates :**

Certificate FI 40847