

UL PC 125/125 HG

Sample image

Order symbol : UL PC 125/125 HG

EAN : 6418074014351

Product nr : 6411310


El. number :

Description : UL Enclosure, PC

• Denmark : 8212030200

Remarks : Grey cover

Including : Base with TPE gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

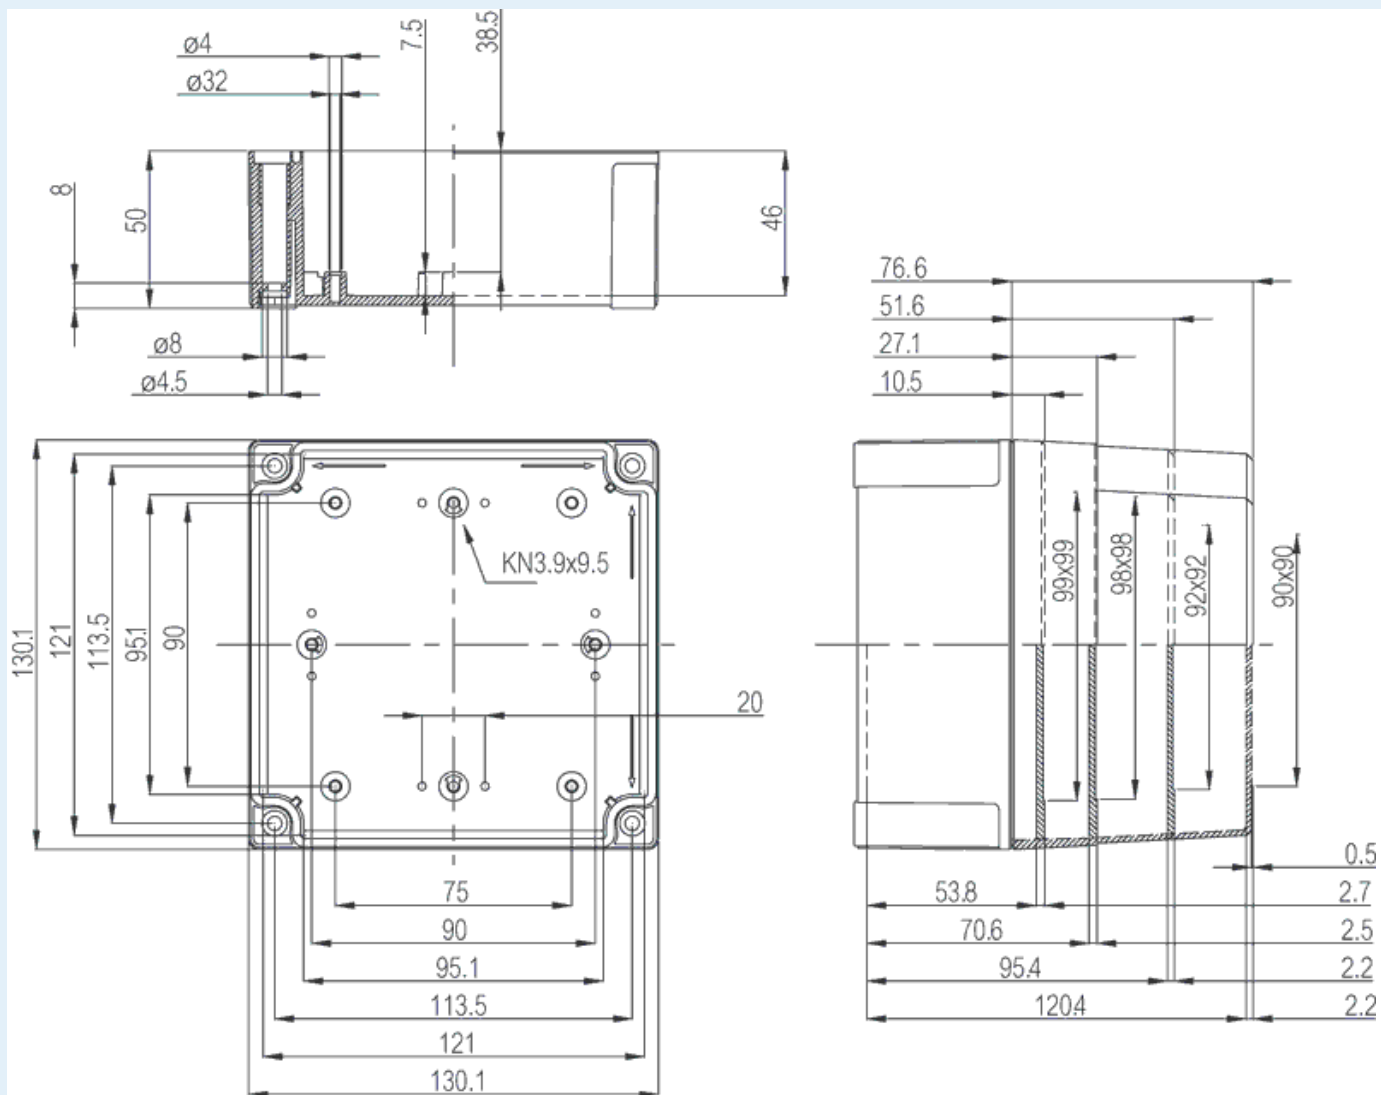

Dimensions :	Height	Width	Depth
mm :	130	130	125

Ratings :	
Ingress protection (EN 60529):	IP66; IP67;

inch : 5.12 5.12 4.92

Materials :

Material : Polycarbonate
Base colour : RAL_7035
Cover colour : RAL 7035 -light grey
Gasket material : Polyurethane

Temperatures :

Temperature °C (continuous) : -40 ... 80
Temperature °F (continuous) : -40 ... 175

Impact Resistance (EN 62262): IK08;
electrical_insulation : Totally insulated
Halogen free (DIN/VDE 0472, Part 815) : Yes
UV resistance : UL 746C
Flammability Rating : UL 94 V0
Glow Wire Test (IEC 695-2-1) °C : 960C
UL Type 1, 4, 4X and 6

Certificates :

Certificate FI 40847