

PCT 162515

Sample image

Order symbol : PCT 162515

EAN : 6418074058690

Product nr : 7022741


El. number :

Description : Enclosure, PC

- Finland : 3435418
- Denmark : 8212002995

Remarks : Clear transparent cover

Including : Base with screws for mounting plate/DIN-rail. cover with PUR gasket and stainless steel cover screws.

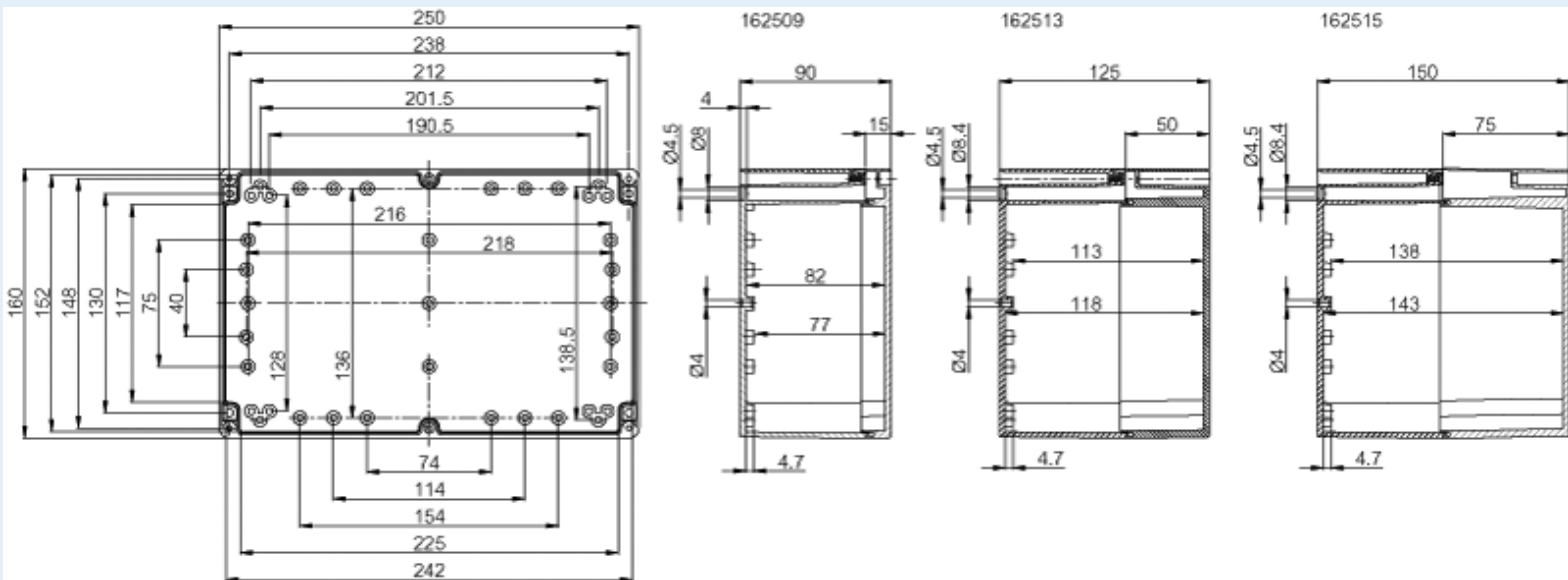

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm : | 160 | 250 | 150 |
| inch : | 6.3 | 9.84 | 5.91 |

Materials :

| | |
|-------------------|-------------------|
| Material : | Polycarbonate |
| Base colour : | RAL_7035 |
| Cover colour : | Clear transparent |
| Gasket material : | Polyurethane |

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 80 |
| Temperature °F (continuous) : | -40 ... 175 |

Accessories :

| | |
|----------|---|
| TM 1625 | Mounting plate, for enclosures: (151 x 214 x 1.5) |
| TRH 24 | DIN-35 Mounting rail, for enclosures: (226 x 35 x 7) |
| TRH 1216 | DIN-35 Mounting rail, for enclosures: (146 x 35 x 7) |
| TRM 0816 | DIN-15 Mounting rail, for enclosures: (146 x 15 x 5) |
| TH A | Grey plastic hinges (2 pcs) (30 x 20 x 12) |

Ratings :

| | |
|--------------------------------|-------------------|
| Ingress protection (EN 60529): | IP66; IP67; |
| Impact Resistance (EN 62262): | IK07; IK08; |
| electrical_insulation : | Totally insulated |

| | |
|---|----------|
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | UL 746C |
| Flammability Rating : | UL 94 V0 |
| Glow Wire Test (IEC 695-2-1) °C : | 960C |

Certificates :

SGSFimko_EURONORD