

# PC 233011



Sample image

**Order symbol :** PC 233011

**EAN :** 6418074003713

**Product nr :** 7032890


**El. number :**

**Description :** Enclosure, PC

- Finland : 3423446
- Denmark : 8212003046
- Sweden : 2536137

**Remarks :** Grey cover

**Including :** Base with screws for mounting plate/DIN-rail. cover with PUR gasket and stainless steel cover screws.

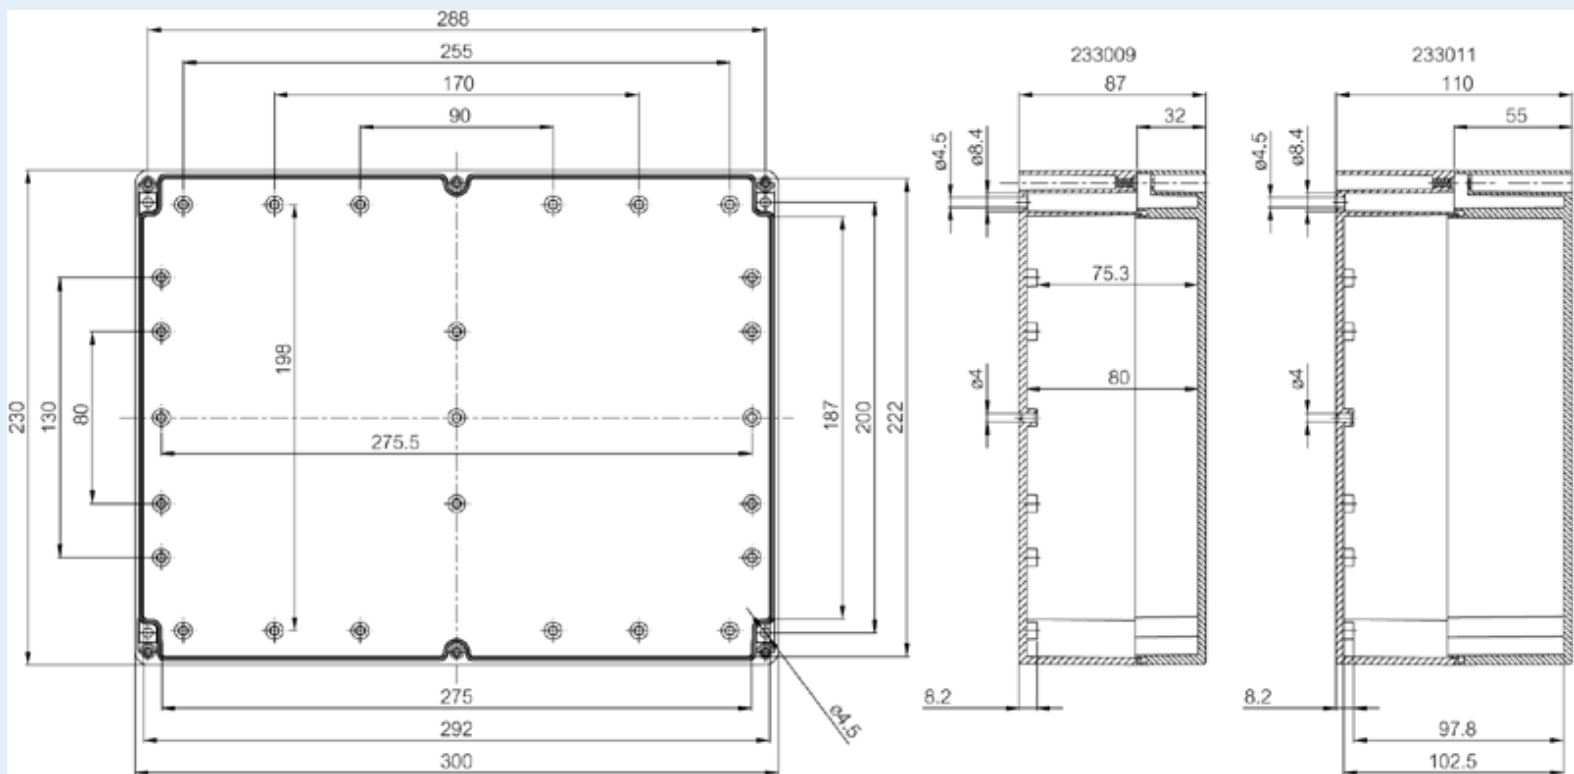

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm :         | 230    | 300   | 110   |
| inch :       | 9.06   | 11.81 | 4.33  |

**Materials :**

**Accessories :**

- TRH 1216 DIN-35 Mounting rail, for enclosures: (146 x 35 x 7)
- TRH 2330 DIN-35 Mounting rail, for enclosures: (285 x 35 x 7)
- TRM 0816 DIN-15 Mounting rail, for enclosures: (146 x 15 x 5)

|                   |                      |
|-------------------|----------------------|
| Material :        | Polycarbonate        |
| Base colour :     | RAL_7035             |
| Cover colour :    | RAL 7035 -light grey |
| Gasket material : | Polyurethane         |

|         |  |
|---------|--|
| TM 2330 | Mounting plate, for enclosures:<br>(221 x 274 x 1.5) |
| TH A    | Grey plastic hinges (2 pcs)<br>(30 x 20 x 12)        |

**Temperatures :**

|                               |             |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 80  |
| Temperature °F (continuous) : | -40 ... 175 |

**Ratings :**

|   |                   |
|---|-------------------|
| Ingress protection (EN 60529):          | IP66; IP67;       |
| Impact Resistance (EN 62262):           | IK07; IK08;       |
| electrical_insulation :                 | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes               |
| UV resistance :                         | UL 746C           |
| Flammability Rating :                   | UL 94 V0          |
| Glow Wire Test (IEC 695-2-1) °C :       | 960C              |

**Certificates :**

SGSFimko\_EURONORD