

ABS 30/25-C3

Sample image

Order symbol : ABS 30/25-C3

EAN : 6418074005946

Product nr : 7580031


El. number :

Description : Enclosure, ABS

- Finland : 3420930
- Denmark : 8212016790

Remarks : With aluminium front plate

Including : Base, terminal compartment cover with EPDM gasket and screws for mounting plate/DIN-rail. -3 and -L3 versions: Transparent cover with PUR gasket, hinges, locking devices, FC version: Closed PC frame front plate with PUR gasket and cover screws.

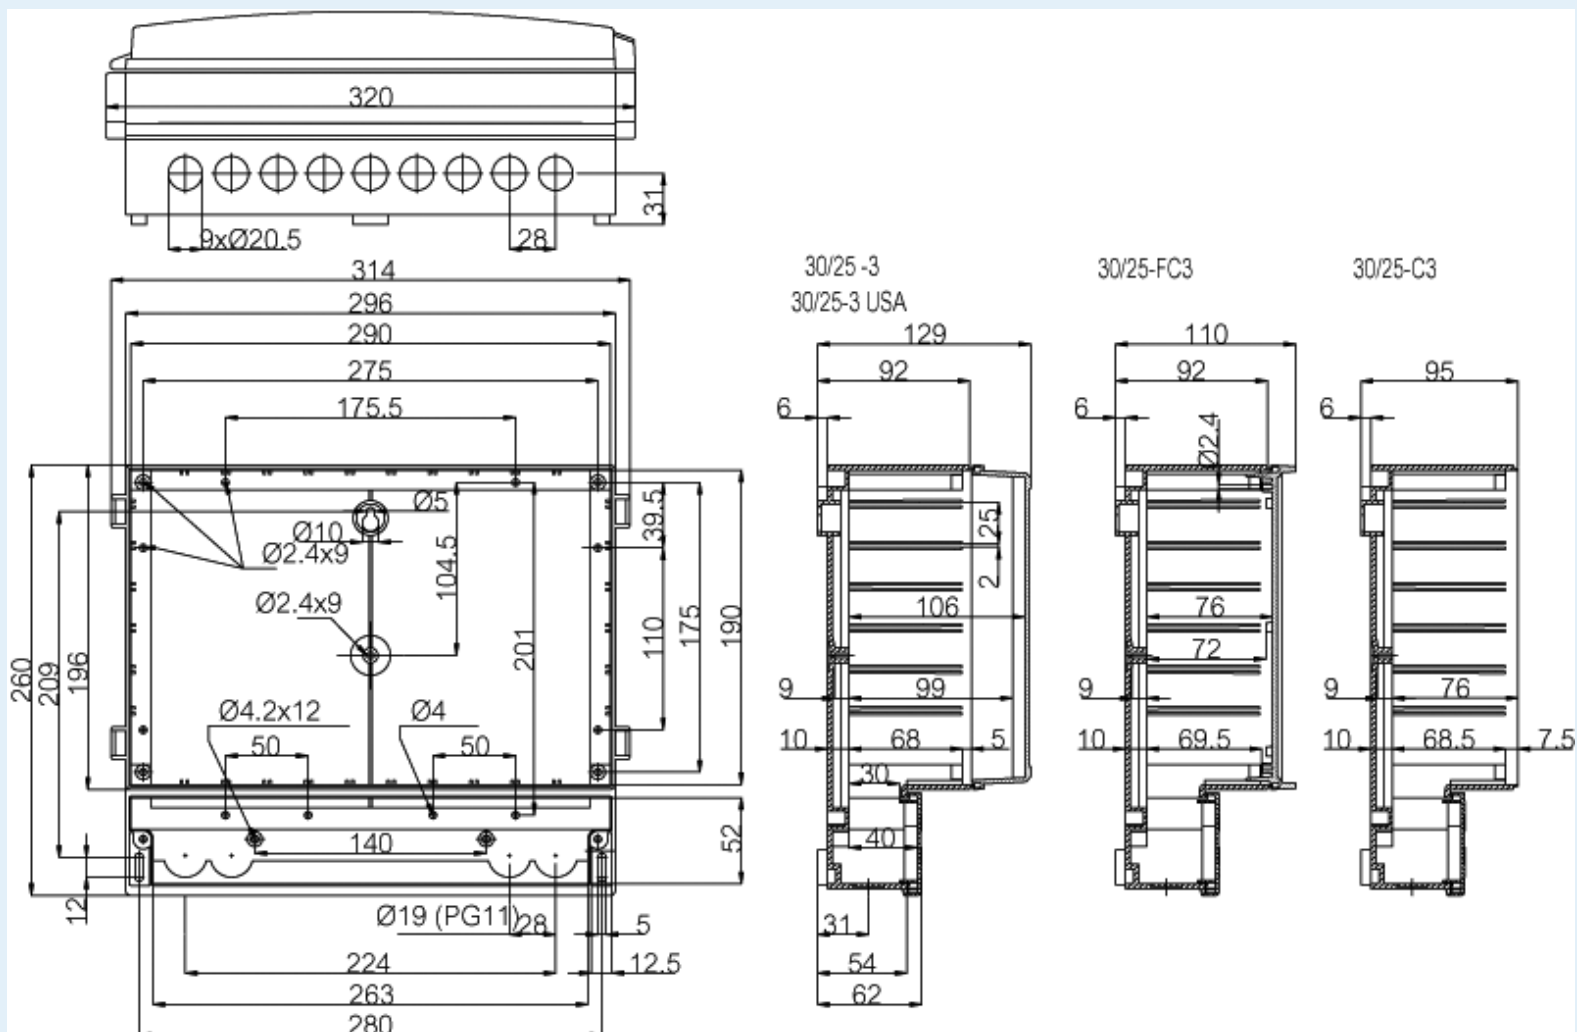

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm : | 314 | 260 | 95 |

Accessories :

FP 30/25 Front plate (aluminium), for enclosures: (290 x 190 x 1)

| | | | |
|--------|-------|-------|------|
| inch : | 12.36 | 10.24 | 3.74 |
|--------|-------|-------|------|

Materials :

| | |
|-------------------|--------------|
| Material : | ABS |
| Gasket material : | Polyurethane |

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 60 |
| Temperature °F (continuous) : | -40 ... 140 |

| | |
|----------|--|
| MP 30/25 | Mounting plate, for enclosures: (282 x 215 x 1) |
|----------|--|

| | |
|-------------|--|
| FC PC 30/25 | Frame of PC front plate, for enclosures: (296 x 196 x 30) |
|-------------|--|

Ratings :

| | |
|---|-------------------|
| Ingress protection (EN 60529): | IP65; |
| Impact Resistance (EN 62262): | IK07; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | - |
| Flammability Rating : | UL 94 HB |
| Glow Wire Test (IEC 695-2-1) °C : | 650C |

Certificates :

SGSFIMKO_CARDpc