

# CAB PCQ 404017 T



Sample image

**Order symbol :** CAB PCQ 404017 T

**EAN :** 6418074011114

**Product nr :** 8113088




**El. number :**

**Description :** Enclosure, PC

- Finland : 3421928
- Denmark : 8212050727
- Sweden : 2540107

**Remarks :** Smoked transparent cover

**Including :** Base with screws for mounting plate/DIN-rail. internal corner plugs. cover with PUR gasket and CS 12137 cover screws.

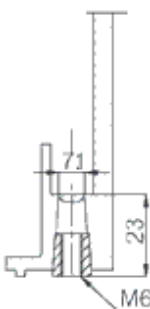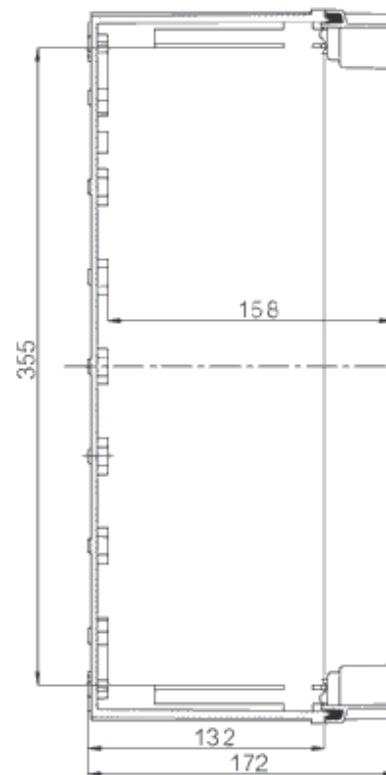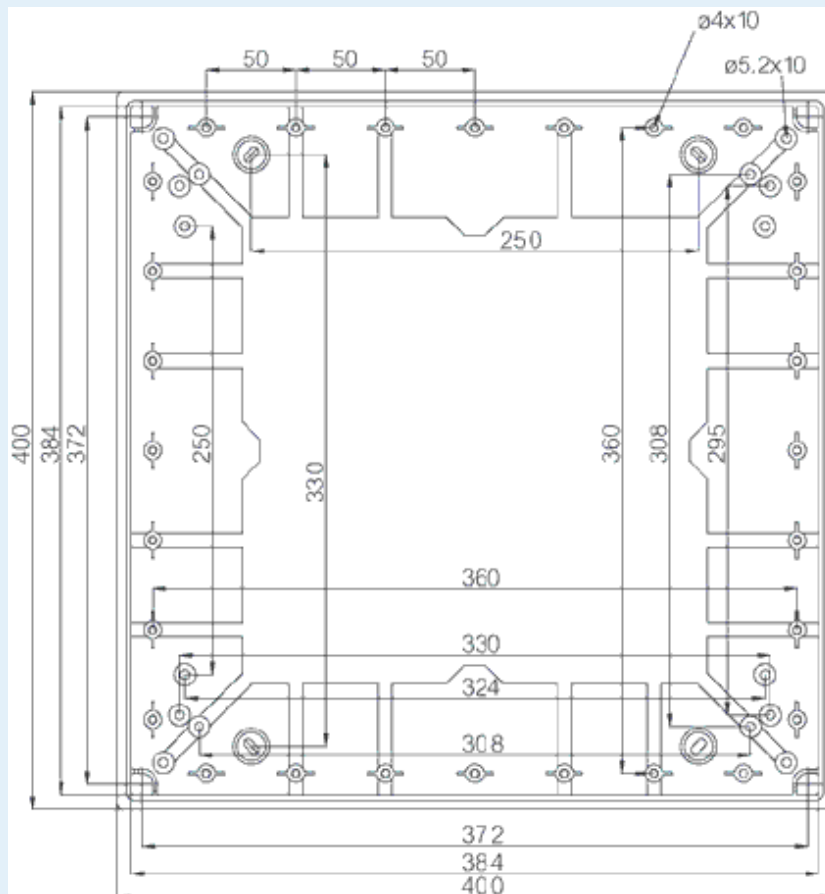

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm :         | 400    | 400   | 170   |
| inch :       | 15.75  | 15.75 | 6.69  |

| Accessories :                      |
|------------------------------------|
| PAT 12040 Hinge set (45 x 35 x 25) |

**Materials :**

|                   |               |
|-------------------|---------------|
| Material :        | Polycarbonate |
| Base colour :     | RAL_7035      |
| Cover colour :    | Smoked grey   |
| Gasket material : | Polyurethane  |

|             |   |
|-------------|---|
| MB 12225 AL | Swing door set<br>(20 x 20 x 80)                          |
| EKIV 37     | DIN-35 Mounting rail, for enclosures:<br>(366 x 35 x 1.5) |
| EKIV 44     | Mounting plate, for enclosures:<br>(370 x 370 x 1.5)      |

**Temperatures :**

|                               |             |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 80  |
| Temperature °F (continuous) : | -40 ... 175 |

**Ratings :**

|   |                   |
|---|-------------------|
| Ingress protection (EN 60529):          | IP66; IP67;       |
| Impact Resistance (EN 62262):           | IK08;             |
| electrical_insulation :                 | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes               |
| UV resistance :                         | UL 746C           |
| Flammability Rating :                   | UL 94 V0          |
| Glow Wire Test (IEC 695-2-1) °C :       | 960C              |

**Certificates :**

Certificate FI 40848