

CAB PC 302018 G3B



Sample image

Order symbol : CAB PC 302018 G3B

EAN : 6418074020048

Product nr : 8113332

El. number :


Description : Cabinet, PC, Grey door

- Finland : 3424105
- Denmark : 8212019205
- Sweden : 2539965

Remarks : Lock on the long side

Including : Cabinet base. door with PUR gasket. 3mm double bit lock(s) with key. screws for mounting plate/DIN-rail and corner plugs.

CAB 3020L

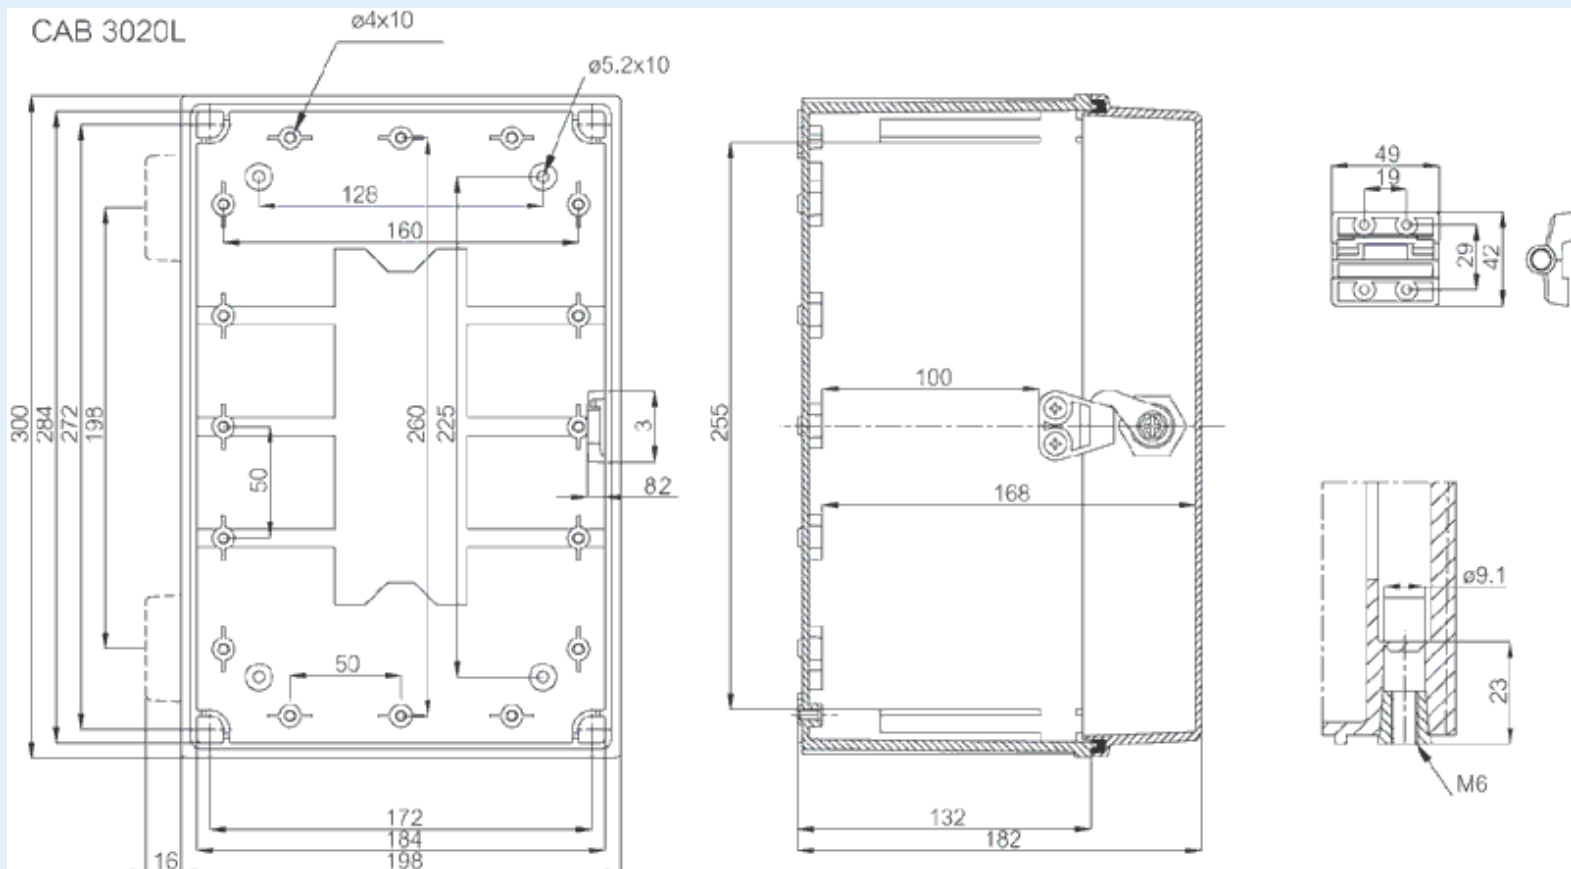

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm : | 300 | 200 | 180 |
| inch : | 11.81 | 7.87 | 7.09 |

Accessories :

- MB 12225 Swing door set (20 x 20 x 80)
- AL
- EKIV 27 DIN-35 Mounting rail, for enclosures:

Materials :

| | |
|-------------------|----------------------|
| Material : | Polycarbonate |
| Base colour : | RAL_7035 |
| Cover colour : | RAL 7035 -light grey |
| Gasket material : | Polyurethane |

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 80 |
| Temperature °F (continuous) : | -40 ... 175 |

(266 x 35 x 1.5)

| | |
|---------|--|
| FP A 23 | Swing-out door/Front plate (aluminium), for enclosures: (168 x 268 x 1) |
| EKIV 17 | DIN-35 Mounting rail, for enclosures: (166 x 35 x 1.5) |
| EKIV 23 | Mounting plate, for enclosures: (170 x 270 x 1.5) |

Ratings :

| | |
|---|-------------------|
| Ingress protection (EN 60529): | IP65; |
| Impact Resistance (EN 62262): | IK08; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | UL 746C |
| Flammability Rating : | UL 94 V0 |
| Glow Wire Test (IEC 695-2-1) °C : | 960C |

Certificates :

Certificate FI 40854