

ARCA 403021



Sample image

Order symbol : ARCA 403021

Product nr : 8120007

Description : Cabinet, PC


Remarks : Grey cover, 2-point locking, hinges on the long side

EAN : 6418074079183

El. number :

- Finland : 3423054
- Denmark : 8212091058
- Sweden : 2500114

Including : Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

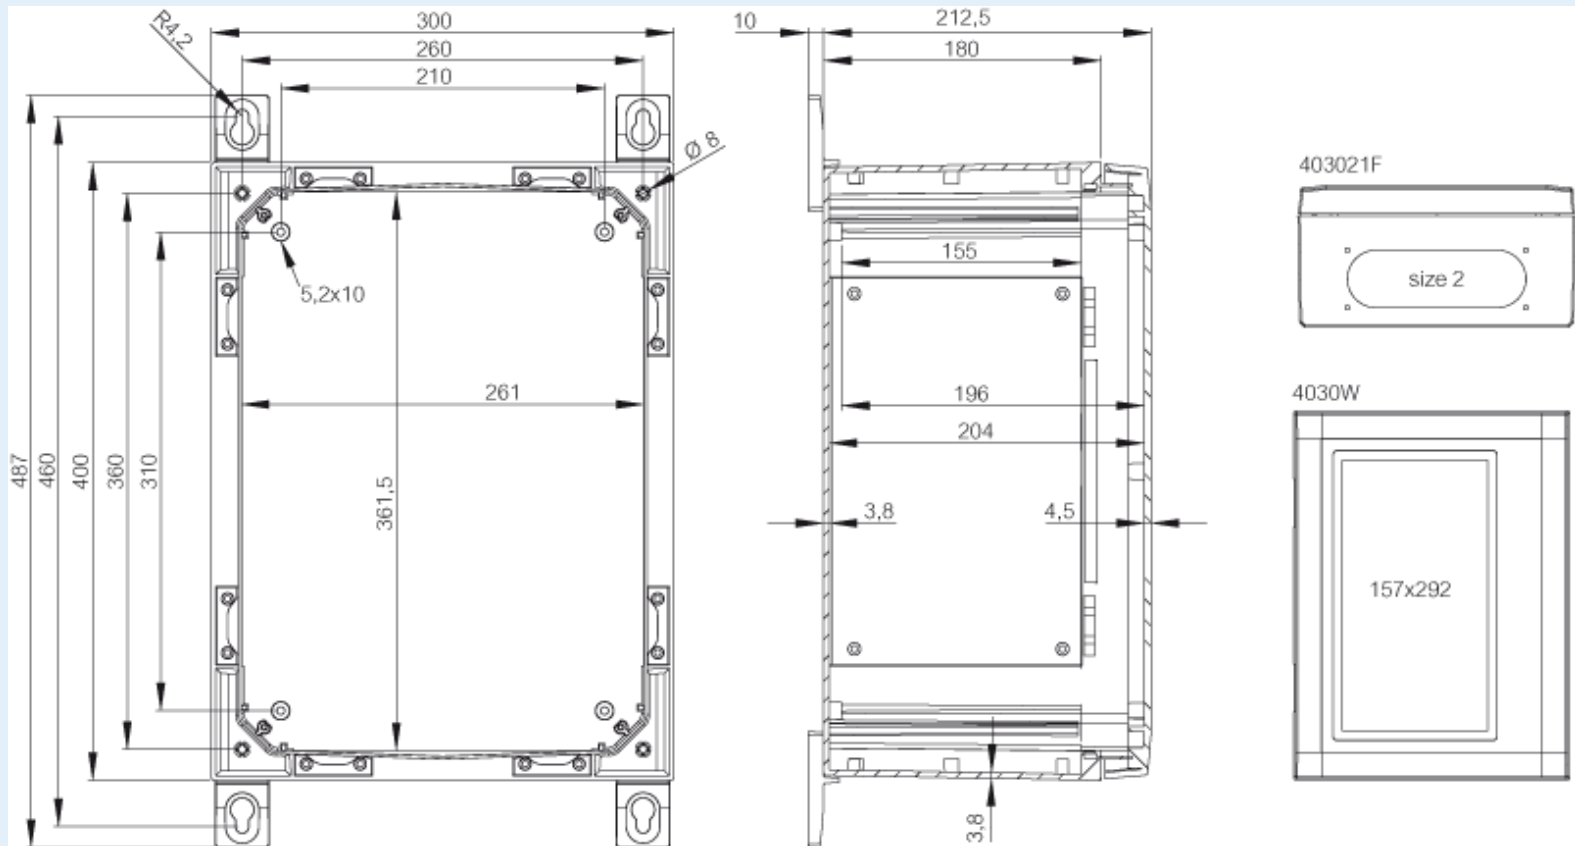

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm : | 400 | 300 | 210 |
| inch : | 15.75 | 11.81 | 8.27 |

| Accessories : | |
|-----------------|-------------------------------------|
| DRS ARCA 403021 | DIN rail frame set (385 x 285 x 35) |

Materials :

| | |
|-------------------|----------------------|
| Material : | Polycarbonate |
| Base colour : | RAL_7035 |
| Cover colour : | RAL 7035 -light grey |
| Gasket material : | Polyurethane |

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 80 |
| Temperature °F (continuous) : | -40 ... 175 |

| | |
|----------------|--|
| RCS ARCA 4030 | Rain canopy set for size 4030 and 3030 (30 x 300 x 20) |
| IDS ARCA 4030 | Inner door set (385 x 285 x 35) |
| PMK ARCA 30 | PoleMounting kit, for pole \varnothing 100-300mm (385 x 285 x 35) |
| DSP ARCA VLS | Door stopper ARCA, vertical, left, small (15 x 104 x 16) |
| MPMP ARCA 4030 | Mounting plate multiperforated (350x250x2 mm - \varnothing 3.6 mm) (350 x 250 x 1.5) |
| DSP ARCA VRS | Door stopper ARCA, vertical, right, small (15 x 104 x 16) |
| MPS ARCA 4030 | Mounting plate (350x250x2 mm) (350 x 250 x 2) |
| MPP ARCA 4030 | Mounting plate perforated (350x250x2 mm - 26x11 mm) (350 x 250 x 2) |
| MPX ARCA 4030 | Mounting plate (350x250 mm) (350 x 250 x 5) |

Ratings :

| | |
|---|-------------------|
| Ingress protection (EN 60529): | IP66; |
| Impact Resistance (EN 62262): | IK10; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | UL 746C |
| Flammability Rating : | UL 94 5VA |
| Glow Wire Test (IEC 695-2-1) °C : | 960C |
| UL Type | 1, 4, 4X, 12, 13 |

Certificates :

Certificate FI 40467