

ARCA 806030 No MP



Sample image

Order symbol : ARCA 806030 No MP

Product nr : 8120019N

Description : Cabinet, PC




Remarks : Grey cover, 2-point locking, hinges on the long side

EAN : 6418074089397

El. number :

- Finland : 3424587
- Denmark : 8212097515
- Sweden : 2507120

Including : Cabinet base. door with PUR gasket. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

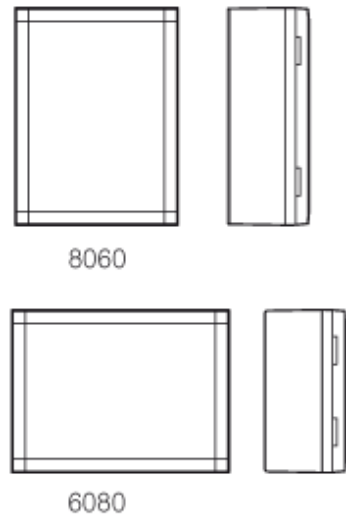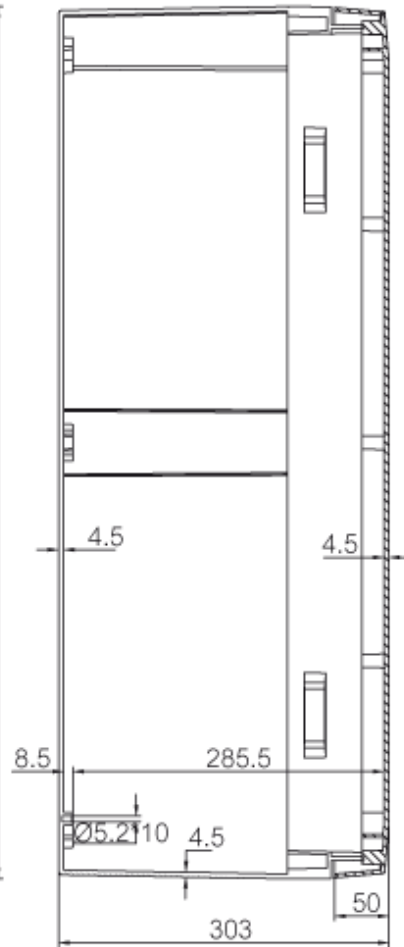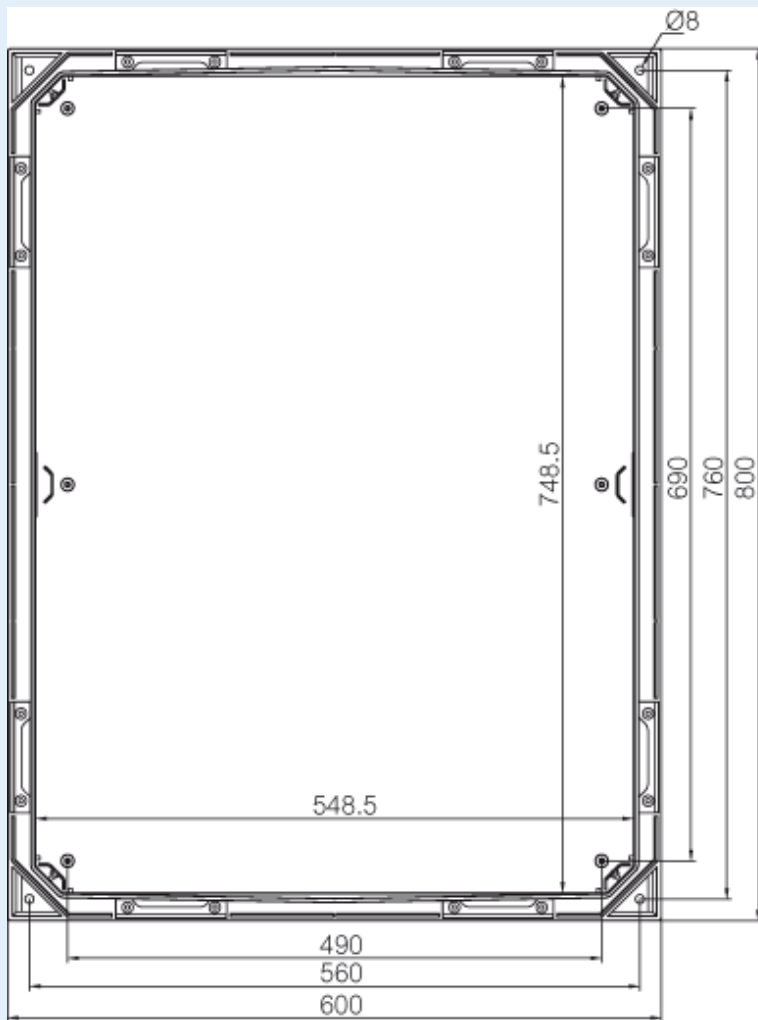

Dimensions :	Height	Width	Depth
mm :	800	600	300
inch :	31.5	23.62	11.81

Materials :

Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

Temperatures :

Temperature °C (continuous) :	-40 ... 80
Temperature °F (continuous) :	-40 ... 175

Accessories :

RCS ARCA 8060	Rain canopy set for size 8060 (50 x 600 x 20)
PMK ARCA 60	PoleMounting kit, for pole ø100-300mm (585 x 385 x 35)
IDS ARCA 8060	Inner door set (785 x 585 x 35)
DSP ARCA RM	Door stopper ARCA, right, midsize 5070-8060 (22 x 200 x 16)
DRS ARCA 806030	DIN rail frame set (785 x 585 x 35)
MPS ARCA 8060	Mounting plate (730x530x2 mm) (730 x 530 x 2)
DSP ARCA LM	Door stopper ARCA, left, midsize 5070-8060 (22 x 200 x 16)
MPMP ARCA 8060	Mounting plate multiperforated (730x530x2 mm - ø3.6 mm) (730 x 530 x 2)
MPP ARCA 8060	Mounting plate perforated (730x530x2 mm - 26x11 mm) (730 x 530 x 2)
MPX ARCA 8060	Mounting plate (730x530 mm) (730 x 530 x 5)

Ratings :

Ingress protection (EN 60529):	IP66;
--------------------------------	-------

Impact Resistance (EN 62262):	IK10;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 746C
Flammability Rating :	UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C :	960C
UL Type	1, 4, 4X, 12, 13

Certificates :

Certificate FI 40467