

# ARCA 806030



Sample image

**Order symbol :** ARCA 806030

**Product nr :** 8120019

**Description :** Cabinet, PC


**Remarks :** Grey cover, 2-point locking, hinges on the long side

**EAN :** 6418074079305

**El. number :**

- Finland : 3423115
- Denmark : 8212091171
- Sweden : 2500122

**Including :** Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

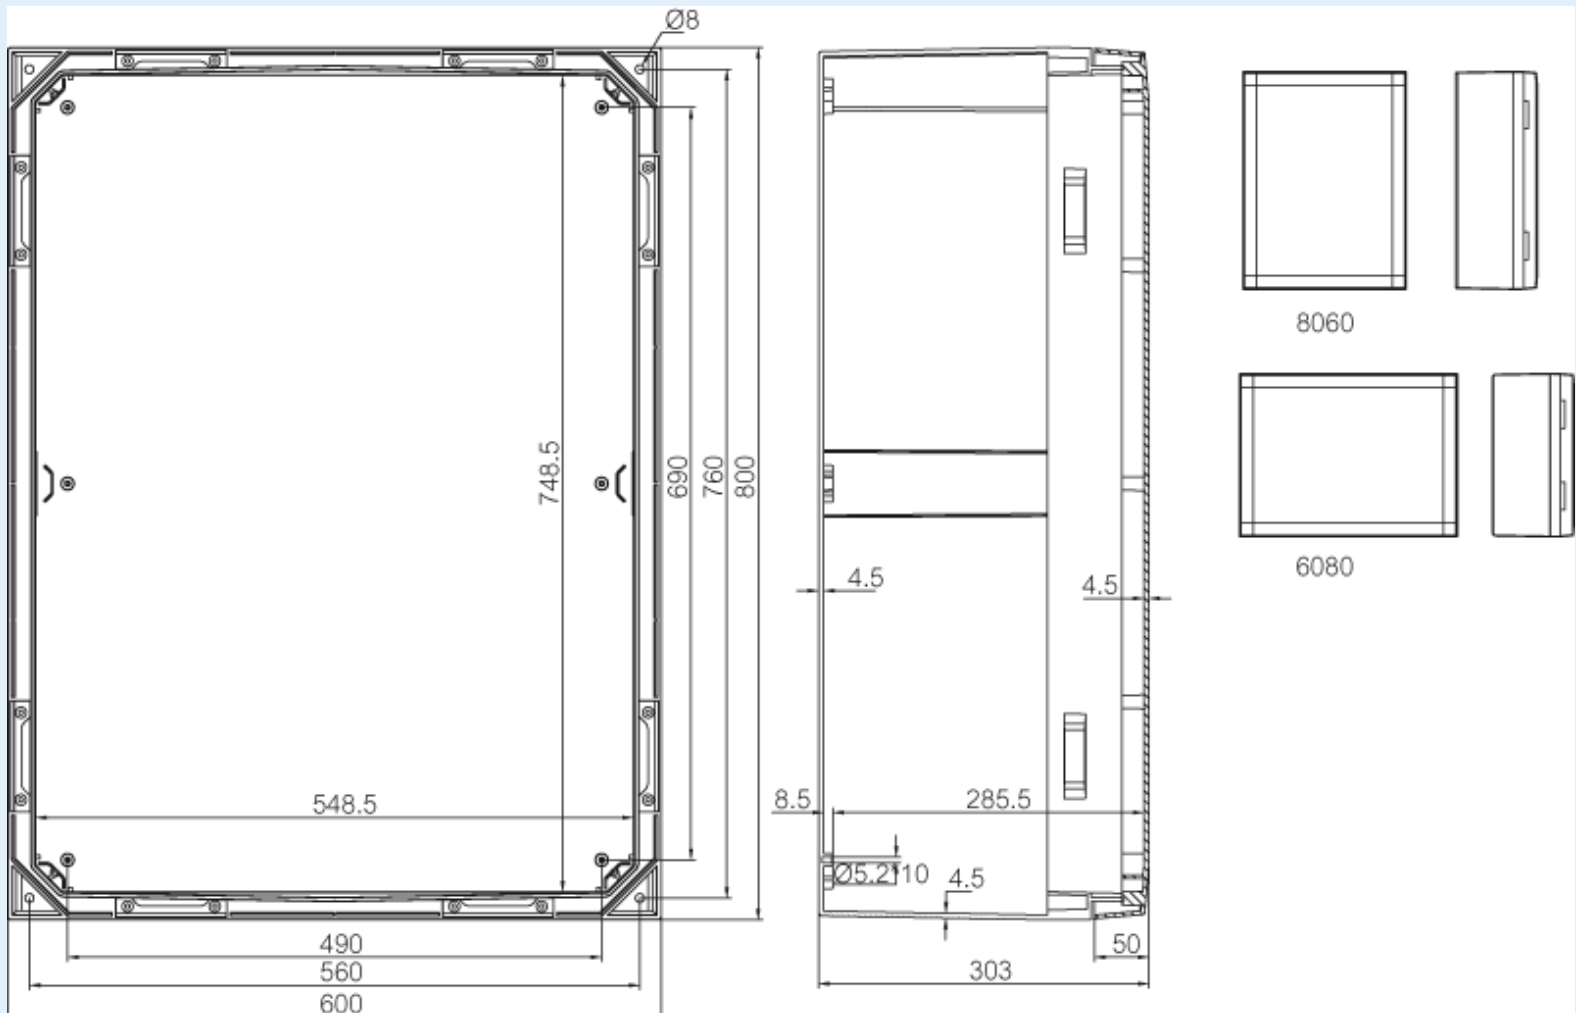

<b>Dimensions :</b>	<b>Height</b>	<b>Width</b>	<b>Depth</b>
mm :	800	600	300
inch :	31.5	23.62	11.81

#### **Materials :**

Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

#### **Temperatures :**

Temperature °C (continuous) :	-40 ... 80
Temperature °F (continuous) :	-40 ... 175

#### **Accessories :**

RCS ARCA 8060	Rain canopy set for size 8060 (50 x 600 x 20)
PMK ARCA 60	PoleMounting kit, for pole $\varnothing$ 100-300mm (585 x 385 x 35)
IDS ARCA 8060	Inner door set (785 x 585 x 35)
DSP ARCA RM	Door stopper ARCA, right, midsize 5070-8060 (22 x 200 x 16)
DRS ARCA 806030	DIN rail frame set (785 x 585 x 35)
MPS ARCA 8060	Mounting plate (730x530x2 mm) (730 x 530 x 2)
DSP ARCA LM	Door stopper ARCA, left, midsize 5070-8060 (22 x 200 x 16)
MPMP ARCA 8060	Mounting plate multiperforated (730x530x2 mm - $\varnothing$ 3.6 mm) (730 x 530 x 2)
MPP ARCA 8060	Mounting plate perforated (730x530x2 mm - 26x11 mm) (730 x 530 x 2)
MPX ARCA 8060	Mounting plate (730x530 mm) (730 x 530 x 5)

#### **Ratings :**

Ingress protection (EN 60529):	IP66;
Impact Resistance (EN 62262):	IK10;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 746C
Flammability Rating :	UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C :	960C
UL Type	1, 4, 4X, 12, 13

#### **Certificates :**

Certificate FI 40467