

ARCA 304015



Sample image

Order symbol : ARCA 304015

Product nr : 8120022

Description : Cabinet, PC


Remarks : Grey cover, 2-point locking, hinges on the short side

EAN : 6418074079336

El. number :

- Finland : 3423119
- Denmark : 8212091207
- Sweden : 2500111

Including : Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

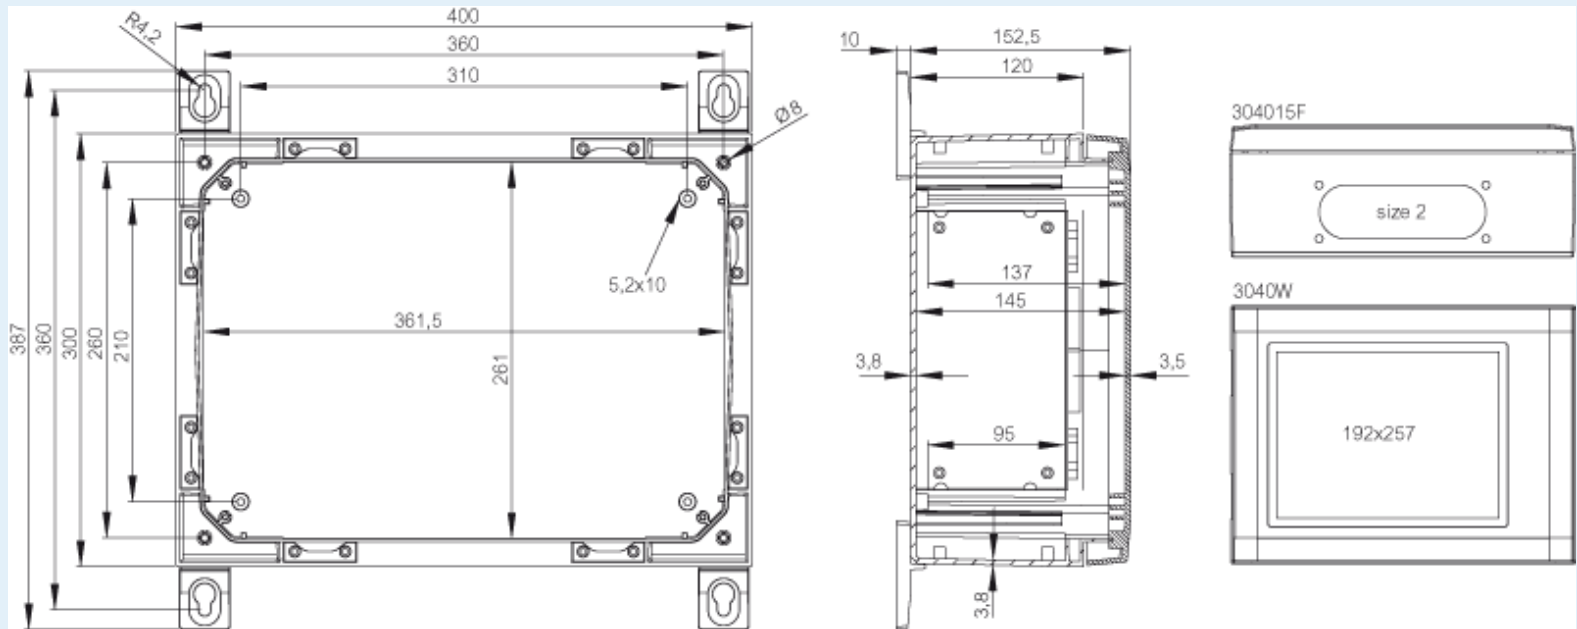

Dimensions :	Height	Width	Depth
mm :	300	400	150
inch :	11.81	15.75	5.91

Materials :

Material : Polycarbonate
Base colour : RAL_7035

Accessories :

- DRS ARCA 304015 : DIN rail frame set (385 x 285 x 35)
- DSP ARCA HRS : Door stopper ARCA, horizontal, right, small (15 x 104 x 16)
- DSP ARCA HLS : Door stopper ARCA, horizontal, left, small (15 x 104 x 16)
- IDS ARCA 3040 : Inner door set
- RCS ARCA : Rain canopy set for size 3040

Cover colour : RAL 7035 -light grey

Gasket material : Polyurethane

Temperatures :

Temperature °C (continuous) : -40 ... 80

Temperature °F (continuous) : -40 ... 175

3040 (30 x 400 x 20)

PMK ARCA 40 PoleMounting kit, for pole ø100-300mm
(385 x 285 x 35)

MPP ARCA 3040 Mounting plate perforated (350x250x2 mm -
26x11 mm)
(250 x 350 x 2)

MPMP ARCA 4030 Mounting plate multiperforated (350x250x2
mm - ø3.6 mm)
(350 x 250 x 1.5)

MPS ARCA 4030 Mounting plate (350x250x2 mm)
(350 x 250 x 2)

MPX ARCA 4030 Mounting plate (350x250 mm)
(350 x 250 x 5)

Ratings :

Ingress protection (EN 60529): IP66;

Impact Resistance (EN 62262): IK10;

electrical_insulation : Totally insulated

Halogen free (DIN/VDE 0472, Part 815) : Yes

UV resistance : UL 746C

Flammability Rating : UL 94 5VA

Glow Wire Test (IEC 695-2-1) °C : 960C

UL Type 1, 4, 4X, 12, 13

Certificates :

Certificate FI 40467