

ARCA 507030



Sample image

Order symbol : ARCA 507030

Product nr : 8120031

Description : Cabinet, PC


Remarks : Grey cover, 2-point locking, hinges on the short side

EAN : 6418074086006

El. number :

- Finland : 3424062
- Denmark : 8212095384
- Sweden : 2500119

Including : Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

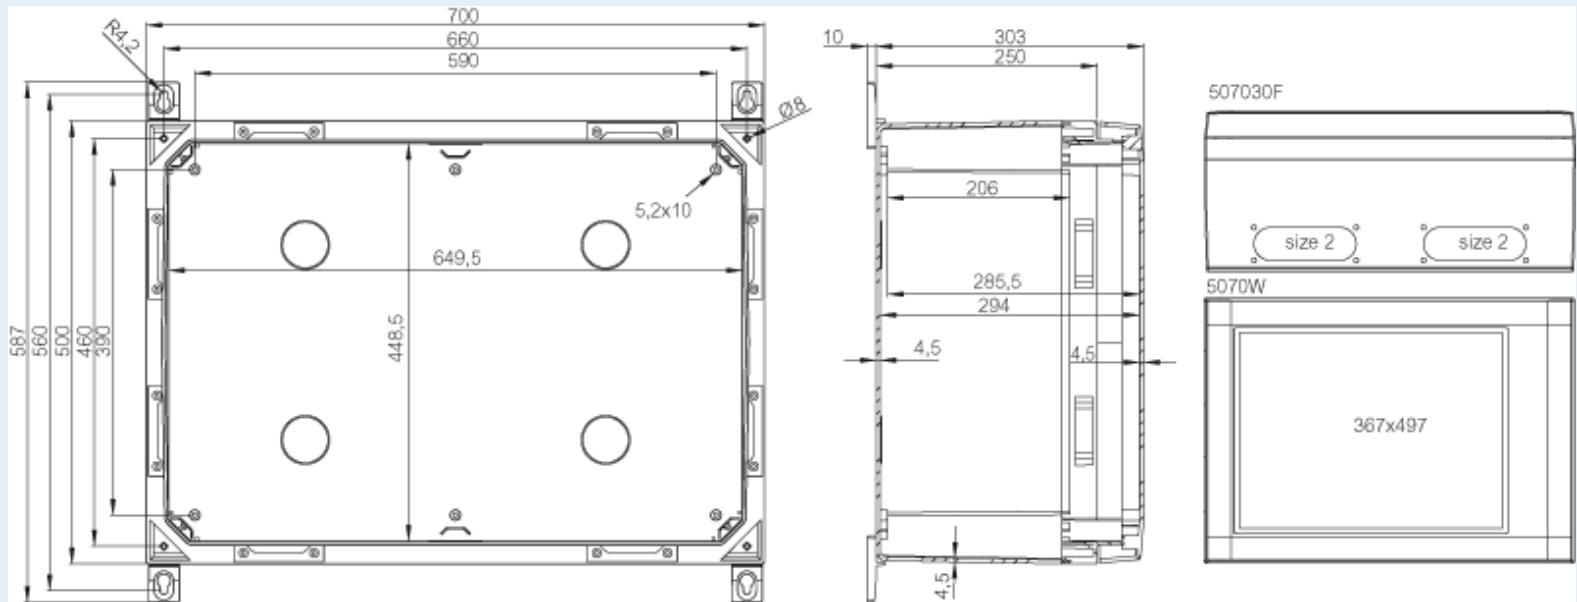

Dimensions :	Height	Width	Depth
mm :	500	700	300
inch :	19.69	27.56	11.81

Materials :

Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey

Accessories :

MPX ARCA 7050	Mounting plate (630x430 mm) (630 x 430 x 5)
PMK ARCA 70	PoleMounting kit, for pole \varnothing 100-300mm (685 x 485 x 35)
RCS ARCA 5070	Rain canopy set for size 5070 (50 x 700 x 20)
DSP ARCA RM	Door stopper ARCA, right, midsize 5070-8060 (22 x 200 x 16)
DRS ARCA 507030	DIN rail frame set (685 x 485 x 35)

Gasket material : Polyurethane

Temperatures :

Temperature °C (continuous) : -40 ... 80

Temperature °F (continuous) : -40 ... 175

IDS ARCA 5070 Inner door set

DSP ARCA LM Door stopper ARCA, left, midsize 5070-8060 (22 x 200 x 16)

MPS ARCA 7050 Mounting plate (630x430x2 mm) (630 x 430 x 2)

MPMP ARCA 7050 Mounting plate multiperforated (630x430x2 mm - ø3.6 mm) (630 x 430 x 2)

MPP ARCA 5070 Mounting plate perforated (630x430x2 mm - 26x11 mm) (430 x 630 x 2)

Ratings :

Ingress protection (EN 60529): IP66;

Impact Resistance (EN 62262): IK10;

electrical_insulation : Totally insulated

Halogen free (DIN/VDE 0472, Part 815) : Yes

UV resistance : UL 746C

Flammability Rating : UL 94 5VA

Glow Wire Test (IEC 695-2-1) °C : 960C

UL Type 1, 4, 4X, 12, 13

Certificates :

Certificate FI 40467