

ARCA 405021W



Sample image

Order symbol : ARCA 405021W

Product nr : 8120145

Description : Cabinet, PC


Remarks : Grey cover with window, 2-point locking, hinges on the short side

EAN : 6418074080165

El. number :

- Finland : 3423224
- Denmark : 8212092015
- Sweden : 2500143

Including : Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

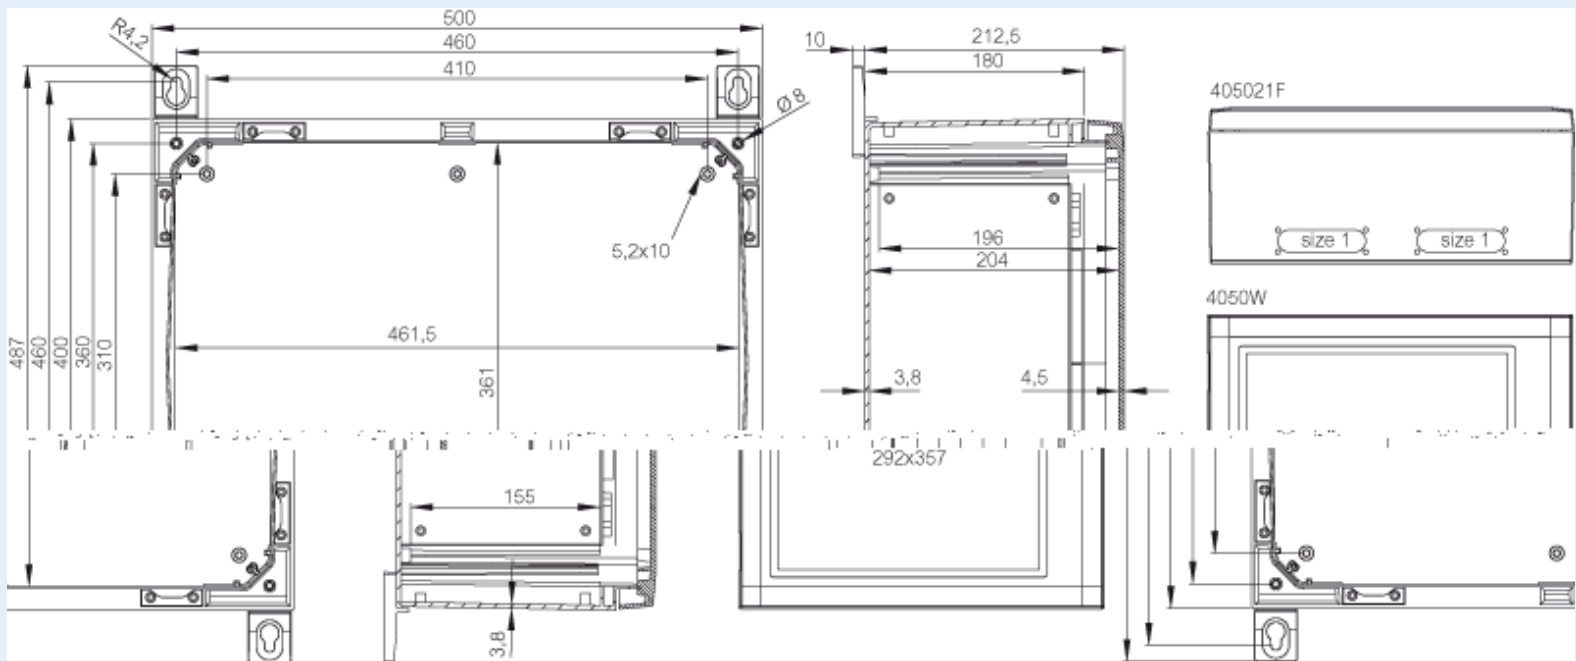

Dimensions :	Height	Width	Depth
mm :	400	500	210
inch :	15.75	19.69	8.27

Materials :

Material : Polycarbonate
Base colour : RAL_7035

Accessories :

- MPX ARCA 5040 : Mounting plate (450x350 mm) (450 x 350 x 5)
- MPMP ARCA 5040 : Mounting plate multiperforated (450x350x2 mm - \varnothing 3.6 mm) (450 x 350 x 1.5)
- DSP ARCA HRS : Door stopper ARCA, horizontal, right, small (15 x 104 x 16)
- DRS ARCA 405021 : DIN rail frame set (485 x 385 x 35)

Cover colour : Clear transparent
Gasket material : Polyurethane

Temperatures :

Temperature °C (continuous) : -40 ... 80
Temperature °F (continuous) : -40 ... 175

DSP ARCA HLS Door stopper ARCA, horizontal, left, small (15 x 104 x 16)
MPP ARCA 4050 Mounting plate perforated (450x350x2 mm - 26x11 mm) (350 x 450 x 2)
MPS ARCA 5040 Mounting plate (450x350x2 mm) (450 x 350 x 2)
PMK ARCA 50 PoleMounting kit, for pole ø100-300mm (485 x 385 x 35)
IDS ARCA 4050 Inner door set
RCS ARCA 4050 Rain canopy set for size 4050 (30 x 500 x 20)

Ratings :

Ingress protection (EN 60529): IP65;
Impact Resistance (EN 62262): IK08;
electrical_insulation : Totally insulated
Halogen free (DIN/VDE 0472, Part 815) : Yes
UV resistance : UL 746C
Flammability Rating : UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C : 960C

Certificates :

Certificate FI 40467