

# ARCA 406021W No MP



Sample image

**Order symbol :** ARCA 406021W No MP

**Product nr :** 8120146N

**Description :** Cabinet, PC


**Remarks :** Grey cover with window, 2-point locking, hinges on the short side

**EAN :** 6418074094230

**El. number :**

- Finland : 3424969
- Denmark : 8212054147

**Including :** Cabinet base. door with PUR gasket. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

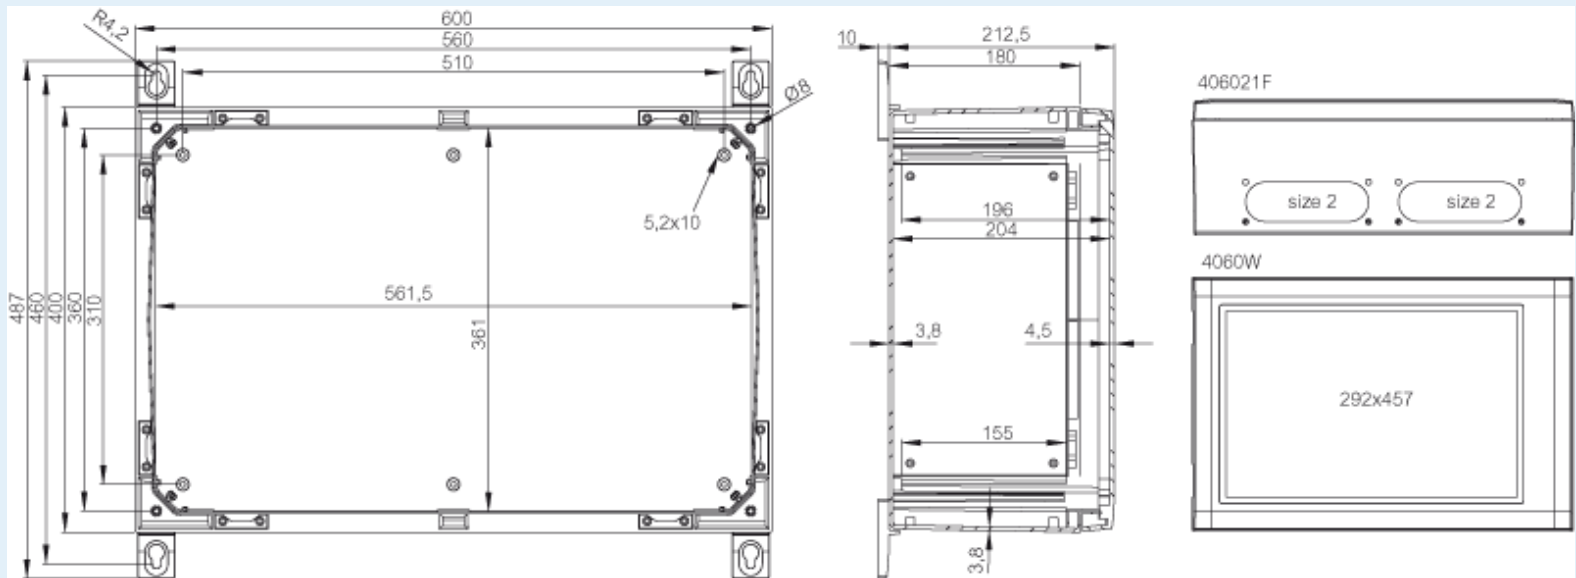

Dimensions :	Height	Width	Depth
mm :	400	600	210
inch :	15.75	23.62	8.27

## Materials :

Material :	Polycarbonate
Base colour :	RAL_7035

## Accessories :

MPS ARCA 6040	Mounting plate (550x350x2 mm) (550 x 350 x 2)
PMK ARCA 60	PoleMounting kit, for pole $\varnothing$ 100-300mm (585 x 385 x 35)
MPP ARCA 4060	Mounting plate perforated (550x350x2 mm - 26x11 mm) (350 x 550 x 2)
DSP ARCA HRS	Door stopper ARCA, horizontal, right, small (15 x 104 x 16)

Cover colour : Clear transparent

Gasket material : Polyurethane

**Temperatures :**

Temperature °C (continuous) : -40 ... 80

Temperature °F (continuous) : -40 ... 175

IDS ARCA  
4060 Inner door set

DSP ARCA  
HLS Door stopper ARCA, horizontal, left, small  
(15 x 104 x 16)

MPMP ARCA  
6040 Mounting plate multiperforated (550x350x2  
mm - ø3.6 mm)  
(550 x 350 x 1.5)

DRS ARCA  
406021 DIN rail frame set  
(585 x 385 x 35)

MPX ARCA  
6040 Mounting plate (550x350 mm)  
(550 x 350 x 5)

RCS ARCA  
4060 Rain canopy set for size 4060  
(30 x 600 x 20)

**Ratings :**

Ingress protection (EN 60529): IP65;

Impact Resistance (EN 62262): IK08;

electrical\_insulation : Totally insulated

Halogen free (DIN/VDE 0472, Part 815) : Yes

UV resistance : UL 746C

Flammability Rating : UL 94 5VA

Glow Wire Test (IEC 695-2-1) °C : 960C

**Certificates :**

Certificate FI 40467