

# UL CAB PC 405020 T

Sample image

**Order symbol :** UL CAB PC 405020 T

**EAN :** 6418074054036

**Product nr :** 8143061


**El. number :**

**Description :** UL Cabinet, PC

• Denmark : 8212034183

**Remarks :** Latches on the short side, smooth

CAB 500x400x200

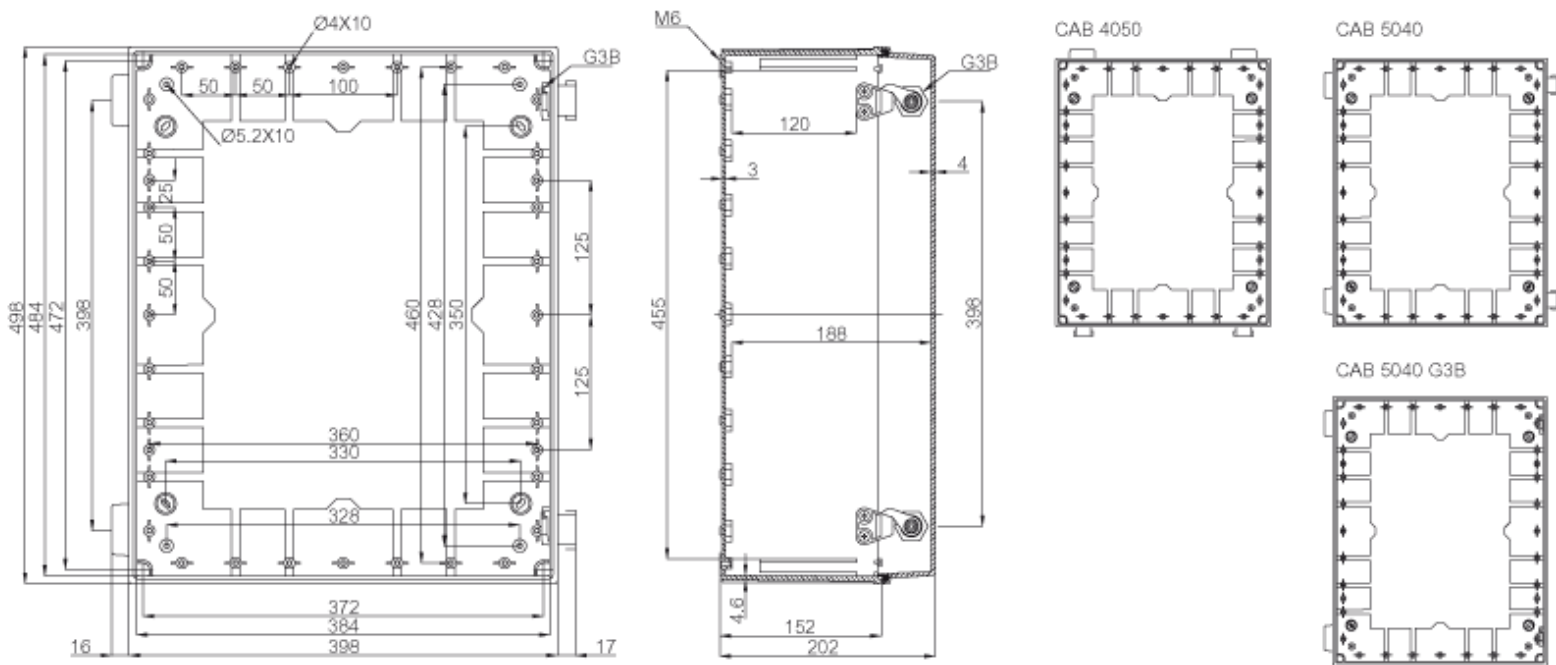

Dimensions :	Height	Width	Depth
mm :	400	500	200
inch :	15.75	19.69	7.87

Ratings :	
Ingress protection (EN 60529):	IP65;
Impact Resistance (EN 62262):	IK08;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 746C
Flammability Rating :	UL 94 V0
Glow Wire Test (IEC 695-2-1) °C :	960C
UL Type	1, 4, 4X, 12, 13

**Materials :**

Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	Clear transparent
Gasket material :	Polyurethane

**Temperatures :**

Temperature °C (continuous) : -40 ... 80  
Temperature °F (continuous) : -40 ... 175

**Certificates :**

Euronord\_CAB\_ALU\_CertificateofCompliance