

# UL CAB PC 504020 G

Sample image

**Order symbol :** UL CAB PC 504020 G

**EAN :** 6418074011411

**Product nr :** 8143360


**El. number :**

**Description :** UL Cabinet, PC

• Denmark : 8212034196

**Remarks :** Latches on the long side, smooth

CAB 500x400x200

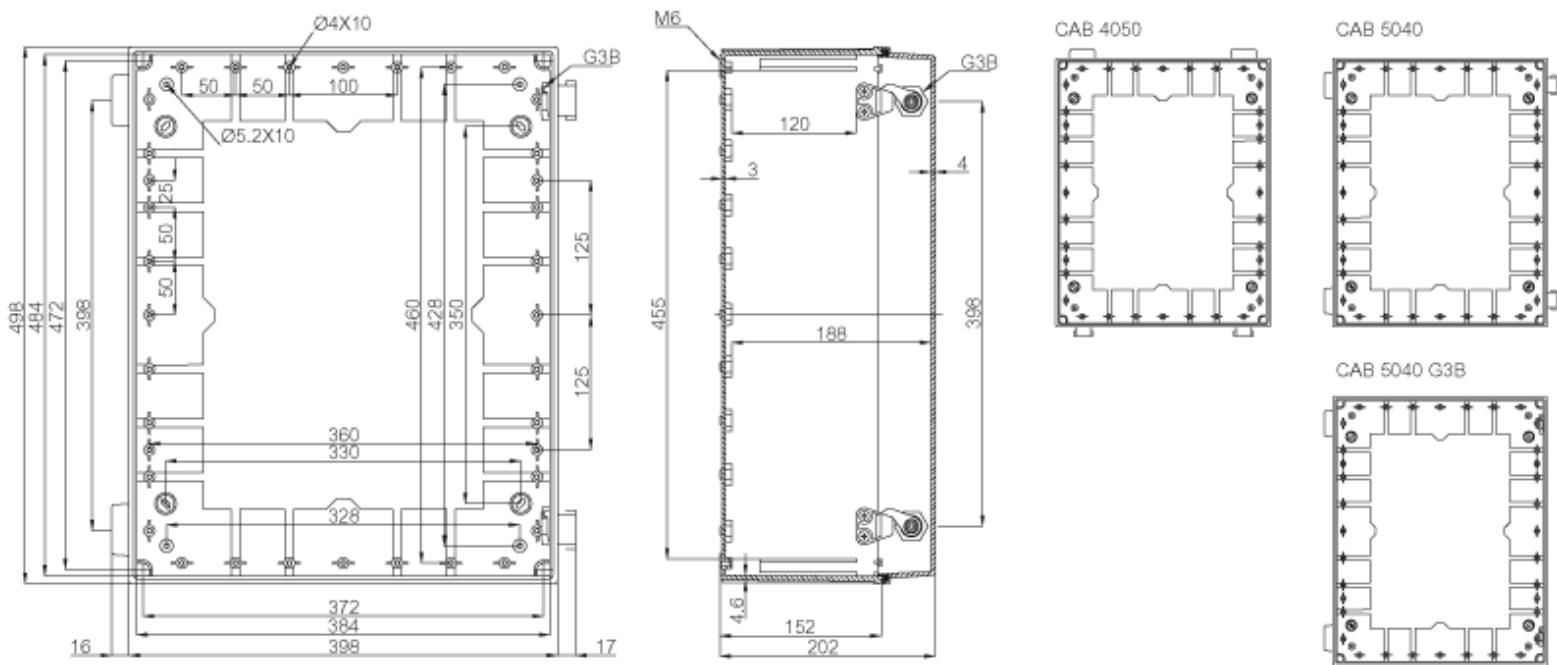

**Dimensions :**

	Height	Width	Depth
mm :	500	400	200
inch :	19.69	15.75	7.87

**Ratings :**

Ingress protection (EN 60529):	IP65;
Impact Resistance (EN 62262):	IK08;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 746C
Flammability Rating :	UL 94 V0
Glow Wire Test (IEC 695-2-1) °C :	960C
UL Type	1, 4, 4X, 12, 13

**Materials :**

Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

**Temperatures :**

Temperature °C (continuous) : -40 ... 80  
Temperature °F (continuous) : -40 ... 175

**Certificates :**

Euronord\_CAB\_ALU\_CertificateofCompliance