

UL CAB PC 405020 G

Sample image

Order symbol : UL CAB PC 405020 G

EAN : 6418074053886

Product nr : 8143361


El. number :

Description : UL Cabinet, PC

• Denmark : 8212034170

Remarks : Latches on the short side, smooth

CAB 500x400x200

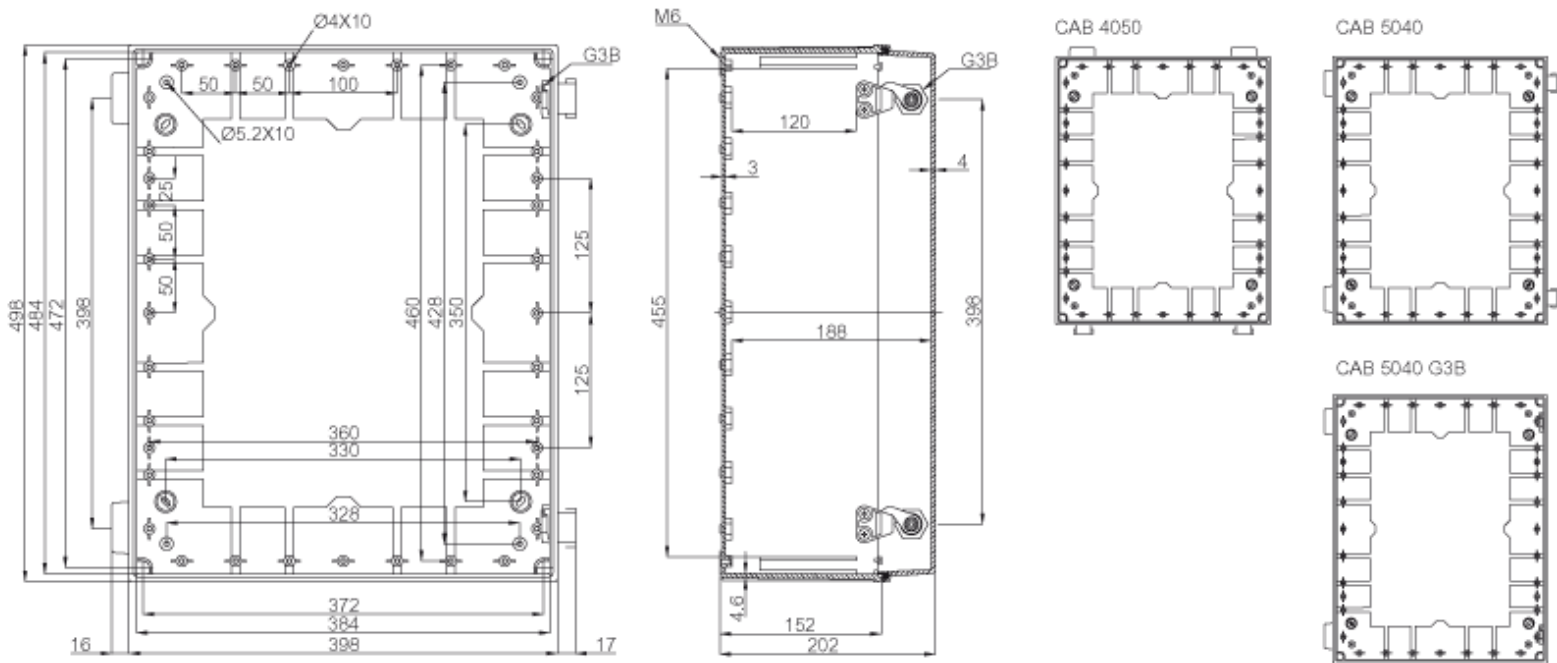

Dimensions :	Height	Width	Depth
mm :	400	500	200
inch :	15.75	19.69	7.87

Ratings :	
Ingress protection (EN 60529):	IP65;
Impact Resistance (EN 62262):	IK08;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 746C
Flammability Rating :	UL 94 V0
Glow Wire Test (IEC 695-2-1) °C :	960C
UL Type	1, 4, 4X, 12, 13

Materials :	
Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

Temperatures :

Temperature °C (continuous) : -40 ... 80
Temperature °F (continuous) : -40 ... 175

Certificates :

Euronord_CAB_ALU_CertificateofCompliance