

# ABS MH 125 G

**FIBOX**  
Enclosing innovations



Sample image

**Order symbol :** ABS MH 125 G

**Product nr :** 8784319

**Description :** Enclosure, ABS


**Remarks :** Grey cover

**EAN :** 6418074054609

**El. number :**

- Finland : 3423470
- Denmark : 8212002050
- Sweden : 2508264

**Including :** Base with screws for mounting plate/DIN-rail. cover with PUR gasket and polyamide cover screws.

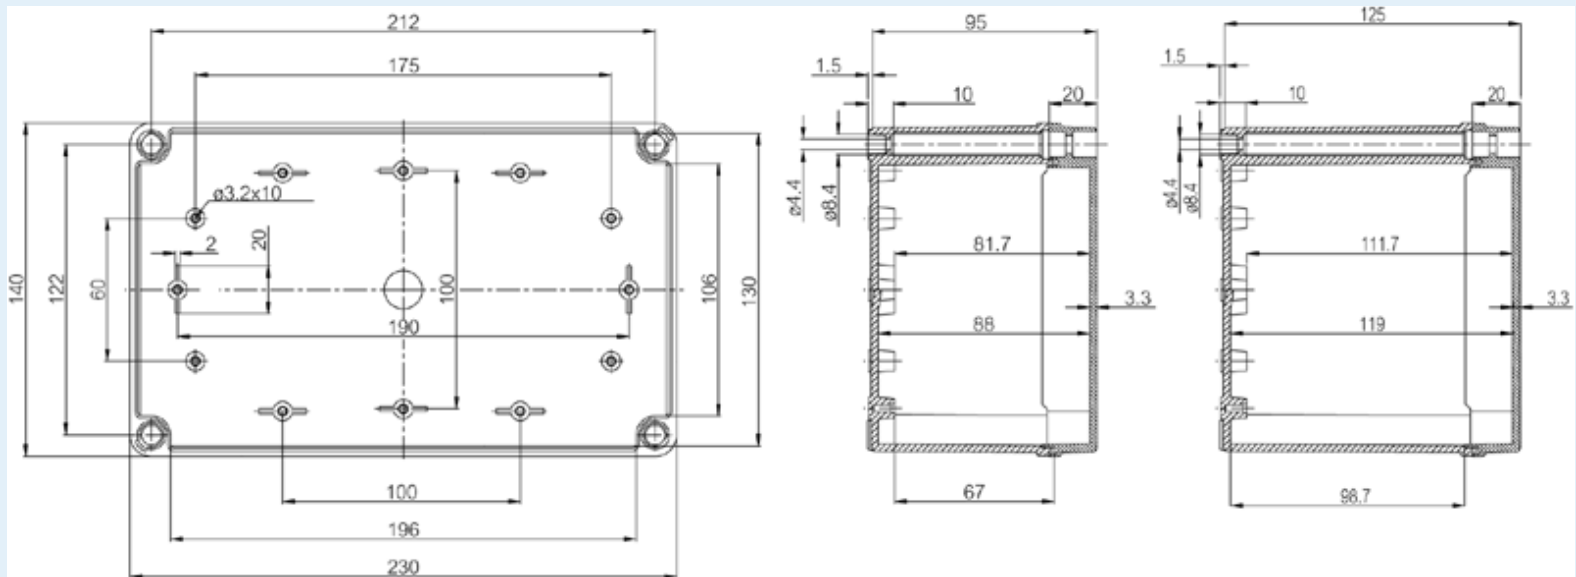

**Dimensions :**

|        | Height | Width | Depth |
|--------|--------|-------|-------|
| mm :   | 230    | 140   | 125   |
| inch : | 9.06   | 5.51  | 4.92  |

**Materials :**

|                   |                      |
|-------------------|----------------------|
| Material :        | ABS                  |
| Base colour :     | RAL_7035             |
| Cover colour :    | RAL 7035 -light grey |
| Gasket material : | Polyurethane         |

**Accessories :**

|          |   |
|----------|---|
| CHM-3    | DIN-35 Mounting rail, for enclosures:<br>(110 x 35 x 7)   |
| FM-3     | DIN-35 Mounting rail, for enclosures:<br>(35 x 200 x 1.5) |
| FP 22046 | Wall fastening lug (4 pcs)<br>(35 x 16 x 10)              |
| M-MP     | Mounting plate, for enclosures:<br>(185 x 94 x 1.5)       |

**Ratings :**

Ingress protection (EN 60529):

IP66; IP67;

**Temperatures :**

|                               |             |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 60  |
| Temperature °F (continuous) : | -40 ... 140 |

|   |                   |
|---|-------------------|
| Impact Resistance (EN 62262):           | IK08;             |
| electrical_insulation :                 | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes               |
| UV resistance :                         | -                 |
| Flammability Rating :                   | UL 94 HB          |
| Glow Wire Test (IEC 695-2-1) °C :       | 650C              |

**Certificates :**

SGSFIMKO\_PICC\_pc