

# UL PC 2819 13 G

Sample image

**Order symbol :** UL PC 2819 13 G

**Product nr :** 5320360

**Description :** UL Enclosure, PC


**Remarks :** Grey cover

**EAN :** 6418074037480

**El. number :**

- Denmark : 8212045185

**Including :** Base with screws for mounting plate. cover with PUR gasket and polyamide cover screws.

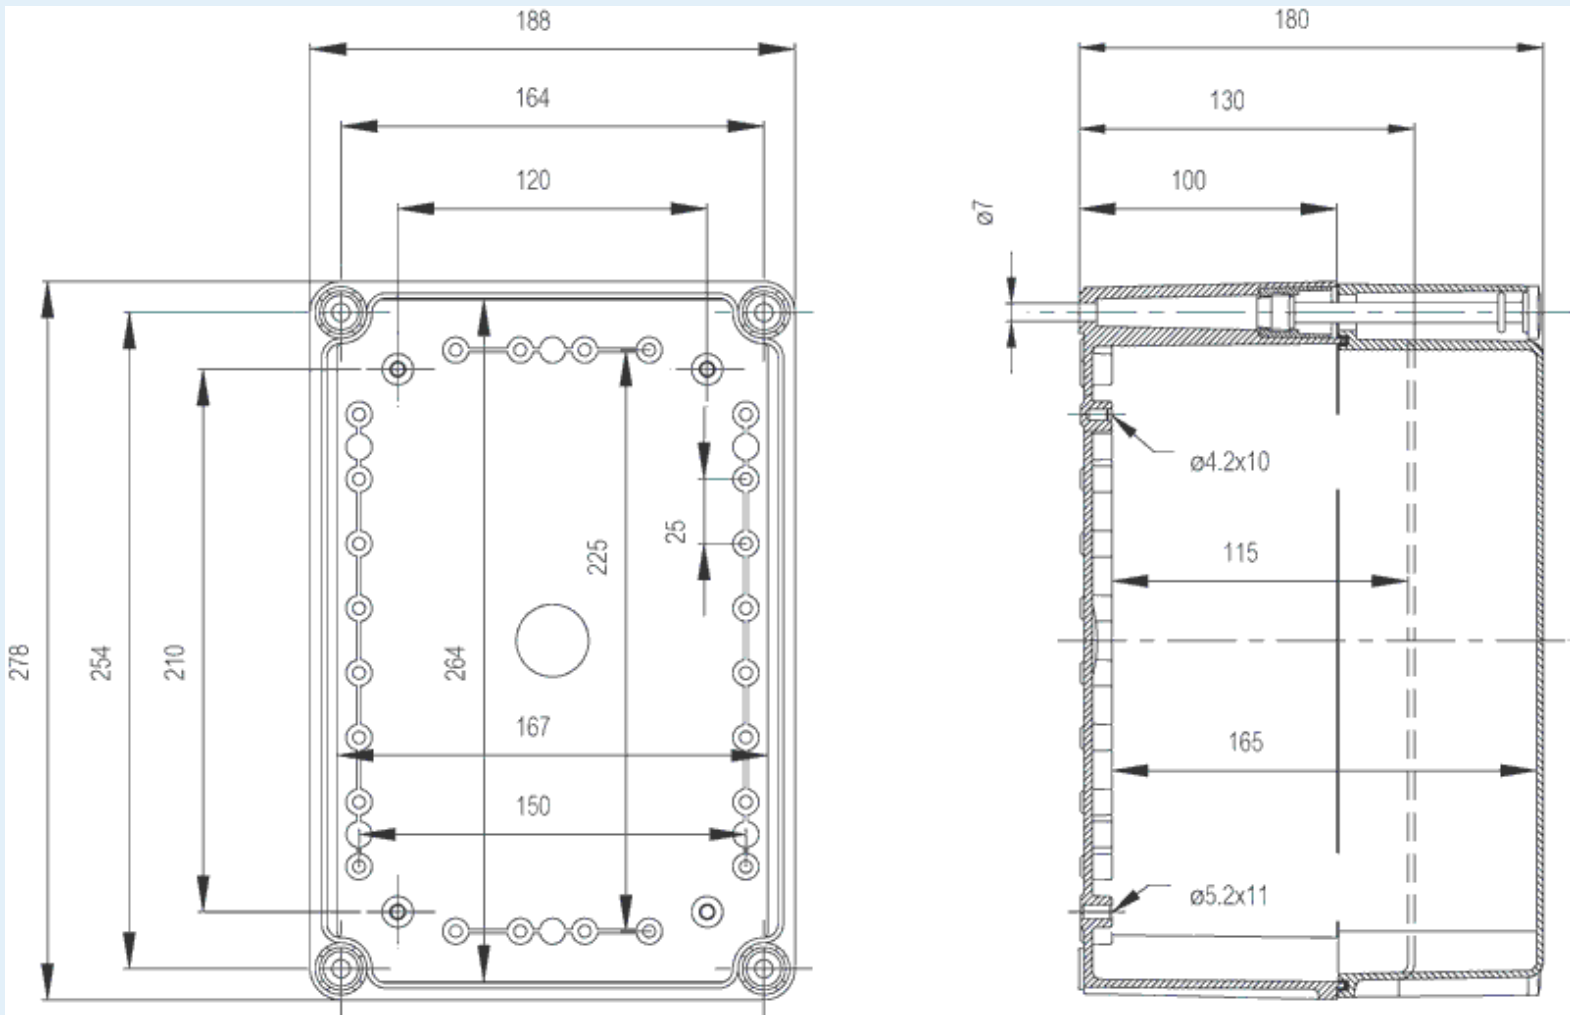

Dimensions :	Height	Width	Depth
mm :	280	190	130
inch :	11.02	7.48	5.12

Ratings :	
Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK08;
electrical_insulation :	Totally insulated

**Materials :**

Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

Halogen free (DIN/VDE 0472, Part 815) :

Yes

UV resistance :

UL 746C

Flammability Rating :

UL 94 V0

Glow Wire Test (IEC 695-2-1) °C :

960C

UL Type

1, 3, 3S, 4, 4X, 6, 6P,  
12

**Temperatures :**

Temperature °C (continuous) : -40 ... 80

Temperature °F (continuous) : -40 ... 175

**Certificates :**

DSS\_FI\_41597\_A1