

AB 162513



Sample image

Order symbol : AB 162513

Product nr : 7083860

Description : Enclosure, ABS


Remarks : Grey cover

EAN : 6418074003577

El. number :

- Finland : 3423492
- Denmark : 8212003648
- Sweden : 2508748

Including : Base with screws for mounting plate/DIN-rail. cover with PUR gasket and stainless steel cover screws.

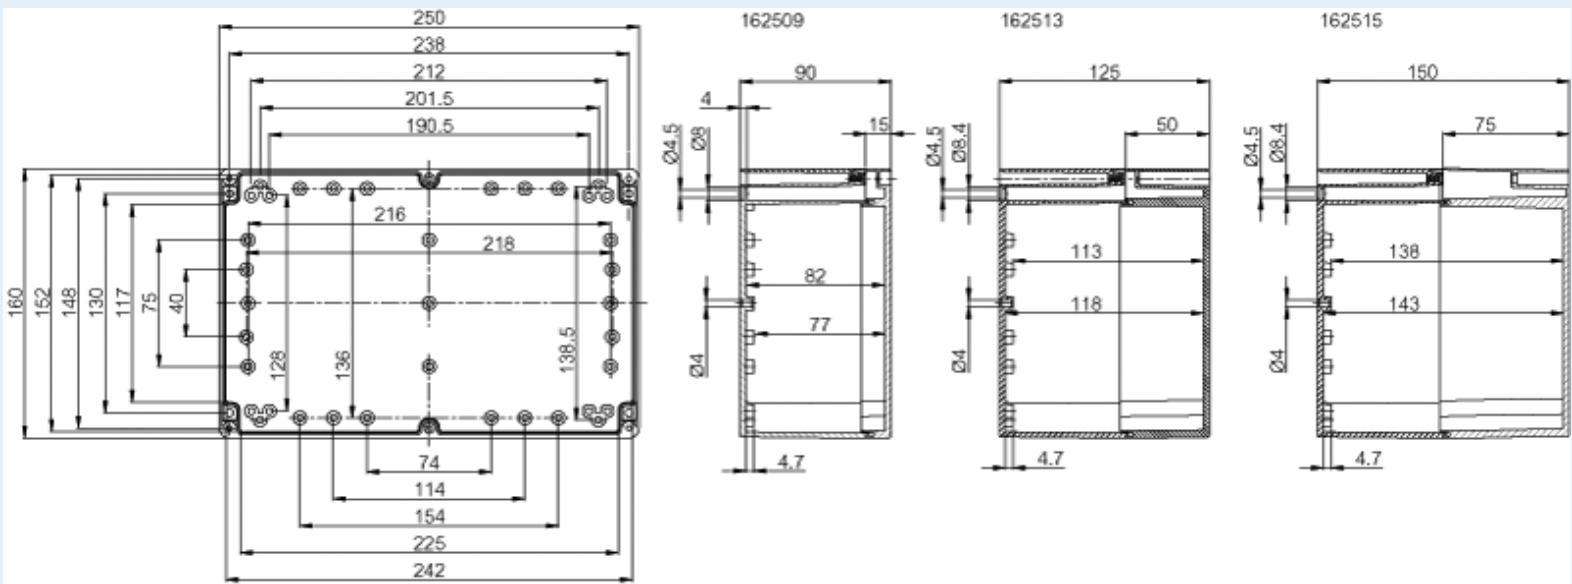

Dimensions :

| | Height | Width | Depth |
|--------|--------|-------|-------|
| mm : | 160 | 250 | 125 |
| inch : | 6.3 | 9.84 | 4.92 |

Materials :

| | |
|-------------------|----------------------|
| Material : | ABS |
| Base colour : | RAL_7035 |
| Cover colour : | RAL 7035 -light grey |
| Gasket material : | Polyurethane |

Accessories :

| | |
|----------|---|
| TM 1625 | Mounting plate, for enclosures: (151 x 214 x 1.5) |
| TRH 24 | DIN-35 Mounting rail, for enclosures: (226 x 35 x 7) |
| TRH 1216 | DIN-35 Mounting rail, for enclosures: (146 x 35 x 7) |
| TRM 0816 | DIN-15 Mounting rail, for enclosures: (146 x 15 x 5) |
| TH A | Grey plastic hinges (2 pcs) (30 x 20 x 12) |

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 60 |
| Temperature °F (continuous) : | -40 ... 140 |

Ratings :

| | |
|---|-------------------|
| Ingress protection (EN 60529): | IP66; IP67; |
| Impact Resistance (EN 62262): | IK07; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | - |
| Flammability Rating : | UL 94 HB |
| Glow Wire Test (IEC 695-2-1) °C : | 650C |

Certificates :

SGSFimko_EURONORD