

# CAB PCQ 302017 G

**FIBOX**  
Enclosing innovations



Sample image

**Order symbol :** CAB PCQ 302017 G

**Product nr :** 8113338

**Description :** Enclosure, PC




**Remarks :** Grey cover

**EAN :** 6418074011145

**El. number :**

- Finland : 3421970
- Denmark : 8212050659
- Sweden : 2539106

**Including :** Base with screws for mounting plate/DIN-rail. internal corner plugs. cover with PUR gasket and CS 12137 cover screws.

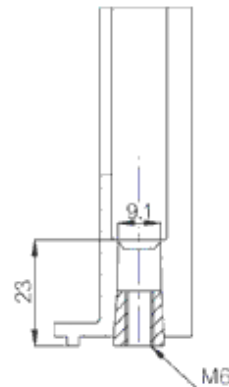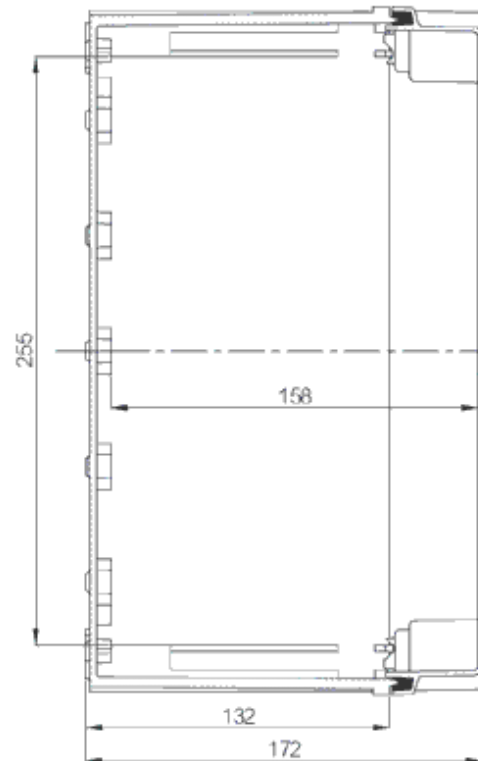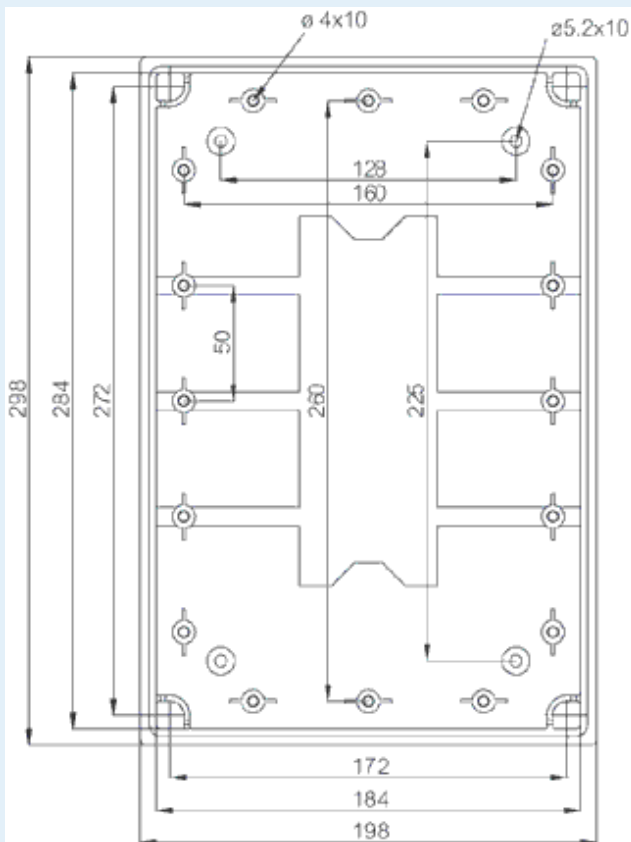

Dimensions :	Height	Width	Depth
mm :	300	200	170
inch :	11.81	7.87	6.69

#### Accessories :

PAT 12040	Hinge set (45 x 35 x 25)
MB 12225 AL	Swing door set (20 x 20 x 80)

**Materials :**

Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

**Temperatures :**

Temperature °C (continuous) :	-40 ... 80
Temperature °F (continuous) :	-40 ... 175

EKIV 27	DIN-35 Mounting rail, for enclosures: (266 x 35 x 1.5)
FP A 23	Swing-out door/Front plate (aluminium), for enclosures: (168 x 268 x 1)
EKIV 17	DIN-35 Mounting rail, for enclosures: (166 x 35 x 1.5)
EKIV 23	Mounting plate, for enclosures: (170 x 270 x 1.5)

**Ratings :**

Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK08;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 746C
Flammability Rating :	UL 94 V0
Glow Wire Test (IEC 695-2-1) °C :	960C

**Certificates :**

Certificate FI 40848