

CAB ABSQ 604027 G

Sample image

Order symbol : CAB ABSQ 604027 G

EAN : 6418074011343

Product nr : 8183878


EI. number :

Description : Cabinet, ABS

• Finland : 3421729

Remarks : Grey cover

Including : Base with screws for mounting plate/DIN-rail. internal corner plugs. cover with PUR gasket and CS 12137 cover screws.

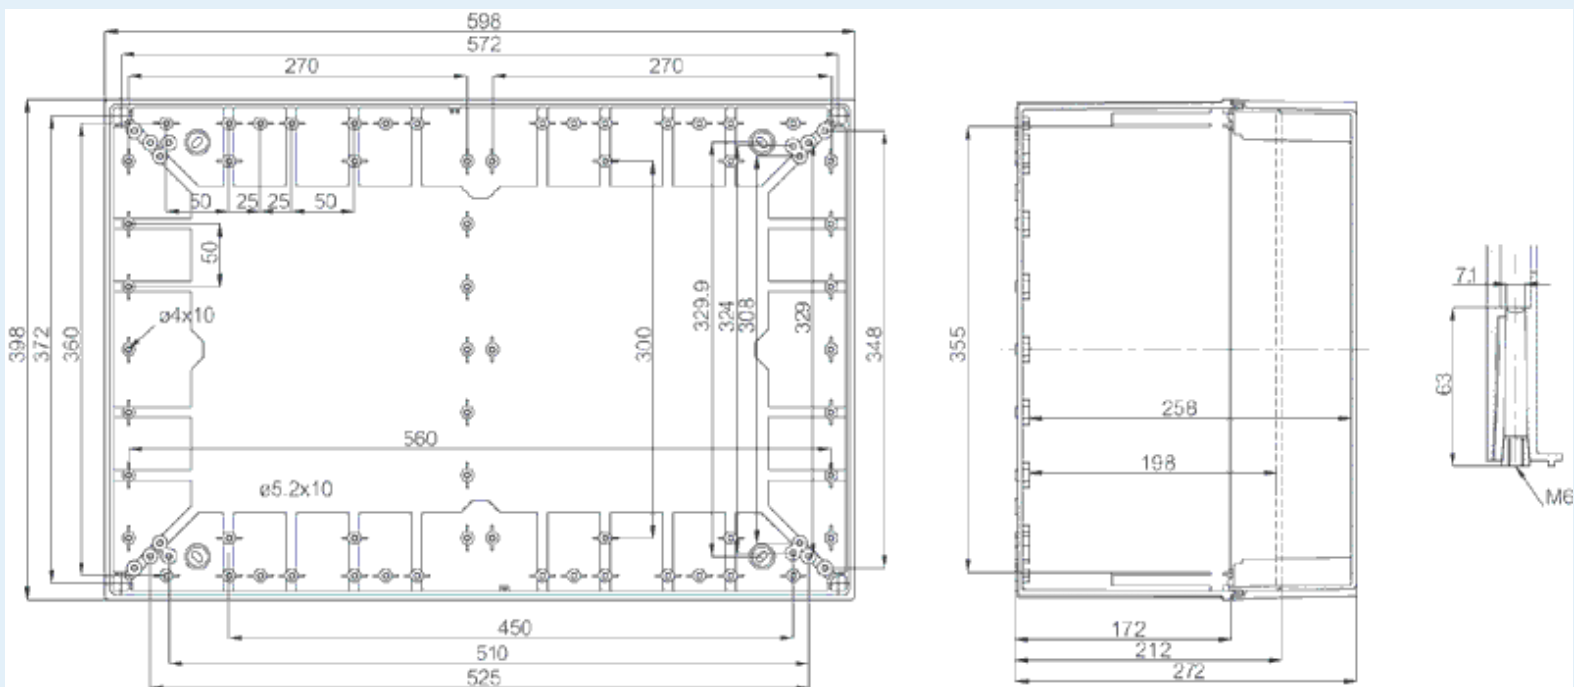

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm : | 600 | 400 | 270 |

Materials :

| | |
|-------------------|----------------------|
| Material : | ABS |
| Base colour : | RAL_7035 |
| Cover colour : | RAL 7035 -light grey |
| Gasket material : | Polyurethane |

Accessories :

| | |
|-------------|-----------------------------------------------------------|
| EKIV 64H | Mounting plate, for enclosures: (570 x 370 x 1.5) |
| PAT 12040 | Hinge set (45 x 35 x 25) |
| MB 12225 AL | Swing door set (20 x 20 x 80) |
| EKIV 37 | DIN-35 Mounting rail, for enclosures: (366 x 35 x 1.5) |

Ratings :

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 60 |
| Temperature °F (continuous) : | -40 ... 140 |

| | |
|-----------------------------------------|-------------------|
| Ingress protection (EN 60529): | IP66; IP67; |
| Impact Resistance (EN 62262): | IK08; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | - |
| Flammability Rating : | UL 94 HB |
| Glow Wire Test (IEC 695-2-1) °C : | 650C |

Certificates :

Certificate FI 40848